

Combining Monte Carlo simulations and experimental design for  
incorporating risk and uncertainty in investment decisions for cleantech:  
a fast pyrolysis case study

Peer-reviewed author version

KUPPENS, Tom; RAFIAANI, Parisa; VANREPPELEN, Kenny; YPERMAN, Jan;  
CARLEER, Robert; SCHREURS, Sonja; THEWYS, Theo & VAN PASSEL, Steven  
(2018) Combining Monte Carlo simulations and experimental design for  
incorporating risk and uncertainty in investment decisions for cleantech: a fast  
pyrolysis case study. In: Clean Technologies and Environmental Policy, 20 (6), p. 1195-1206.

DOI: 10.1007/s10098-018-1543-1

Handle: <http://hdl.handle.net/1942/26037>

# **Combining Monte Carlo simulations and experimental design for incorporating risk and uncertainty in investment decisions for cleantech: a fast pyrolysis case study**

Tom Emile Kuppens<sup>1,\*</sup>, Parisa Rafiaani<sup>1,2</sup>, Kenny Vanreppelen<sup>3,4</sup>, Jan Yperman<sup>3</sup>, Robert Carleer<sup>3</sup>, Sonja Schreurs<sup>3,4</sup>, Theo Thewys<sup>1</sup>, Steven Van Passel<sup>1,5</sup>

<sup>1</sup>UHasselt – Hasselt University, Environmental Economics Research Group, Center for Environmental Sciences (CMK), Agoralaan, 3590 Diepenbeek, Belgium

<sup>2</sup>Economics and Rural Development, Gembloux Agro-Bio Tech, University of Liège, 5030 Gembloux, Belgium

<sup>3</sup>UHasselt – Hasselt University, Applied and Analytical Chemistry Research Group, Center for Environmental Sciences (CMK), Agoralaan, 3590 Diepenbeek, Belgium

<sup>4</sup>UHasselt – Hasselt University, Nuclear Technology (NuTeC) Research Group, Center for Environmental Sciences (CMK), Agoralaan, 3590 Diepenbeek, Belgium

<sup>5</sup>UAntwerpen – Antwerp University, Department of Engineering Management, Prinsstraat 13, 2000 Antwerp, Belgium

\*Corresponding author: Tom Emile Kuppens (e-mail: [tom.kuppens@uhasselt.be](mailto:tom.kuppens@uhasselt.be) – telephone: +32 11 26 87 55 – ORCID: 0000-0002-1392-6393)

# **Combining Monte Carlo simulations and experimental design for incorporating risk and uncertainty in investment decisions for cleantech: a fast pyrolysis case study**

## **Abstract**

The value of phytoextracting crops (plants cultivated for soil remediation) depends on the profitability of the sequential investment in a conversion technology aimed at the economic valorization of the plants. However, the net present value (NPV) of an investment in such an innovative technology is risky due to technical and economic uncertainties. Therefore, decision makers want to dispose of information about the probability of a positive NPV, the largest possible loss, and the crucial economic and technical parameters influencing the NPV. This paper maps the total uncertainty in the NPV of an investment in fast pyrolysis for the production of combined heat and power (CHP) from willow cultivated for phytoextraction in the Belgian Campine. The probability of a positive NPV has been calculated by performing Monte Carlo simulations. Information about possible losses has been provided by means of experimental design. Both methods are then combined in order to identify the key economic and technical parameters influencing the project's profitability. It appears that the case study has a chance of 87 % of generating a positive NPV with an expected value of 3 million euro (MEUR), whilst worst case scenarios predict possible losses of 7 MEUR. The amount of arable land, the biomass yield, the purchase price of the crop, the policy support and the product yield of fast pyrolysis are identified as the most influential parameters. It is concluded that both methods, i.e. Monte Carlo simulations and experimental design, provide decision makers with complementary information with regard to economic risk.

## **Keywords**

Economic risk, Monte Carlo simulations, Experimental design, Cleantech, Pyrolysis, Phytoremediation

## 1. Introduction

A vast area of agricultural land in the Belgian Campine has been moderately contaminated with cadmium (Cd) (Kuppens and Thewys 2010). Hence, the polluted farmland should not be used for the cultivation of crops for consumption, but instead can be employed for the growth of energy crops that simultaneously take up Cd from the soil (Khalid et al., 2017). The use of plants for metal removal by concentrating them in the harvestable parts is called *phytoextraction* (Ensley 2000) and has an impact on the farmer's income (Kuppens et al. 2015). For instance, Yang et al., 2017 argue that the choice of the phytoextracting crop influences income during the clean-up period as it determines the valorization potential of the biomass (Kuppens et al. 2010).

Willow appears to have good phytoextraction potential on the sandy, acidic soils of the Belgian Campine (Vangronsveld et al. 2009). Its lignocellulosic chemical composition motivates the choice for thermochemical conversion technologies (combustion, gasification and pyrolysis). Fast pyrolysis prevents metals from volatilization because of its low process temperature compared to combustion and gasification (Stals et al. 2010). For small scales fast pyrolysis is also more profitable than gasification or combustion (Kuppens and Thewys 2010). Because of these two reasons fast pyrolysis is a better conversion technology for the valorization of the phytoextracting willow compared to combustion and gasification.

Entrepreneurs, however, are only willing to invest if the net present value (NPV) of the cash flows generated by the investment is positive. Techno-economic assessment (TEA) has been of growing interest for calculating the NPV of fast pyrolysis. For example Hu (2015), employed TEA to examine the economic feasibility of converting pyrolysis oil from biomass into biofuels, biochemicals and hydrocarbon chemicals. Furthermore, Brown et al. (2013) estimated the minimum fuel selling price of gasoline and diesel produced via fast pyrolysis and hydroprocessing and concluded that they have the potential to be more profitable than petroleum. In addition, the economic potential of phytotechnologies is gaining importance as well. Rentsch et al. (2016) highlighted the economic feasibility of producing germanium through phytomining. Novo et al. (2015) studied the economic viability of rhenium

phytomining. In another research, Nkrumah et al. (2016) presented the economic potential of nickel phytomining for intensive and extensive production systems such as demonstrated in the USA and Albania respectively, whereas Van der Ent et al. (2013) showed the economic potential of nickel phytomining in Indonesia.

The prediction of the NPV is by definition associated with uncertainty (Kazantzi et al. 2013). A source of uncertainty are the differences in the approach employed among scholars to determine the values of technical and market variables (Brown and Wright, 2014). Therefore, the parameters of the economic model need to be represented by suitable probability distributions (Li et al., 2015). One of the most common ways to conduct uncertainty analysis is through Monte Carlo simulations (Hsu, 2012) which randomly produce samples of the parameter to analyse the level of uncertainty in the results. Considering the probabilities on a subjective basis in the Monte Carlo simulations bring some doubt over suitability of the method (Gadallah 2011). Van Groenendaal and Kleijnen (1997) propose methods from design of experiments (DOE) as an alternative to identify the most influential factors on profitability of a project without considering probability distributions. To our knowledge, experimental design and Monte Carlo simulations have never been combined in techno-economic assessments before, and especially not within the domain of pyrolysis of phytoextracting crops. The results from both methods are compared and help us to provide more robust advice on risk reduction strategies. After all, Yatim et al. (2017) emphasize that lack of knowledge regarding risks and uncertainties related to the biomass industry is one of the reasons for the slow growth of such industries and innovative technologies.

## **2. Methodology**

A techno-economic model has been built for the prediction of the cash flows from an investment in fast pyrolysis. It became clear that the values of expenditure and revenue items are highly uncertain. Therefore, Monte Carlo simulations and Plackett-Burman designs following the approach of Van Groenendaal and Kleijnen (2002) have been performed in order to check the sensitivity of the NPV for

changes in the input variables of the techno-economic model and to predict the probability of a positive NPV.

## **2.1 Techno-economic model**

The techno-economic model of fast pyrolysis serves as an input for a larger cost-benefit analysis of phytoextraction as a whole. Phytoextraction is often proposed as a low cost remediation technology with the longer time frame required for reclamation (compared to traditional excavation techniques) as its main disadvantage. If phytoextraction could be combined with a revenue earning operation its time constraint might become less important. The repercussions of phytoextraction on the farmer's income can be based on the "income per hectare per year" as a measurement concept (Vassilev et al. 2004).

During phytoextraction a farmer sells the produced phytoextracting biomass. It is expected that the resulting income is much lower than the income that can be earned by the current activities of the farmers in the Campine (mainly from dairy cattle rearing). This lost income can be considered as the cost of phytoextraction and depends both on the level of income during soil reclamation and the time required for soil sanitation (Vassilev et al. 2004).

After phytoextraction, the cleaned up soil can be used for the cultivation of high value vegetables. It is expected that these vegetables generate an income that is higher than the income from current activities on polluted soils (Lewandowski et al. 2006). This income increase can be considered as the benefit of phytoextraction.

Assessing the techno-economic potential of fast pyrolysis contributes to the determination of the farmer's income during phytoextraction with willow. The farmer receives a price for selling one tonne of willow to an investor in renewable energy. The price that an investor is willing to pay for obtaining one tonne of willow depends on the "net present value" (NPV), which is today's value of current and future cash flows generated by the investment using a predetermined discount rate that accounts for the opportunity cost of money (see Eq. 1):

$$NPV = \sum_{n=1}^T \frac{CF_n}{(1+i)^n} - I_0 \quad (1)$$

with:  $T$  = life time of the investment, i.e. 20 years (every year is indexed by the symbol “ $n$ ”);  
 $CF_n$  = cash flow in year  $n$ ;  
 $i$  = discount rate, i.e. 9 % (Ochelen and Putzeijs 2008);  
 $I_0$  = investment expenditure in year 0.

The cash flow in year  $n$  is the sum of the after tax  $(1 - \tau)$  difference between revenues in year  $n$  ( $R_n$ ) and expenditure in year  $n$  ( $E_n$ ), and the tax shield caused by depreciation ( $D_n$ ) which lowers yearly taxable profits and hence the expenditure paid by the investor for taxes in year  $n$  (see Eq. 2):

$$CF_n = (1 - \tau) \cdot (R_n - E_n) + \tau \cdot D_n \quad (2)$$

The prediction of revenues and expenditure in each year is based on literature and checked with expert opinion where possible. Most of the times a range of values has been found for the revenue and expenditure items which causes economic risk. For each item base-case values have been determined as the average of the most prevalent values (excluding outliers) or as the most current figure available. These base-case values however are quantities that will take some value in the future, but that are unknown at the moment of decision-making because of a lack of knowledge.

## 2.2 Monte Carlo simulations

Uncertainty can be measured by probabilities (Hertz 1979). Besides, information about the impact of a change in the assumptions on the predicted NPV is required. As base-case assumptions are more likely to occur than the extremes of the ranges found in literature, best and worst case scenarios contain little information value. Monte Carlo analysis overcomes this problem by taking into account probability distributions for uncertain quantitative assumptions. Monte Carlo simulations are one of the most straightforward ways to apply uncertainty analysis (Li, 2015). However, whenever one wants to predict

the product yields of the pyrolysis process, one can use the technique of artificial neural networks (ANN). ANN has been used by Karaci et al. (2016) to predict the production of hydrogen gas from pyrolysis of waste materials and by Aydinli et al. (2017) to predict both energy and material production from biomass pyrolysis. However, ANN can be considered as a black box (Karaci et al. 2016) that provides little explanatory insight into the contributions of the independent variables in the prediction process (Olden et al. 2004). The focus here actually is not on the prediction of the NPV, but on the identification of the uncertainties that contribute the most to the variance of the NPV. Therefore, Monte Carlo simulations in combination with experimental design have been preferred above the use of ANN. Monte Carlo analysis has been integrated in the “unifying approach” for expressing economic risk proposed by Aven et al. (2004):

1. The overall system performance measure has been identified as the NPV;
2. The deterministic techno-economic model links the system performance measure (NPV) and observable quantities;
3. Use probabilities to express uncertain observable quantities. The uncertain variables have been identified according to the following principles:
  - a. some variables are uncertain by definition, e.g. market prices;
  - b. other variables might be slightly uncertain but have a very large impact on the NPV;
  - c. after selecting the variables following (a) and (b), their impact on the variability of the NPV is investigated and the variables which explain the largest part are withheld.
4. Calculate the probability distribution of the NPV given the assumed probability distributions of the determining variables by means of Monte Carlo simulations.

Triangular probability distributions have been chosen to express uncertainty for the intuitive nature of its defining parameters (Vose 2000). The triangular distribution is an adequate solution when literature is insufficient for deriving probabilities (Haimes 2004). It is also the most commonly used distribution for modeling expert opinion (Vose 2000). All possible correlations between input variables have been built in the techno-economic model, so that the remaining uncertain variables can be considered as independent and the construction of correlated variables in the Monte Carlo simulations is not



appropriate (Savvides 1994). For instance, it is reasonable to expect some negative covariance between investment costs ( $I$ ) and processed quantity ( $\Phi$ ) due to expected economies of scale. This correlation has been built in the techno-economic model by the structure defined for investment equations ( $I = a\Phi^d$ ) developed during a meta-analysis of investment costs. The only uncertainty remaining is about the exact level of the constant  $a$  and the exponent  $d$  in this equation, which is independent of the processed quantity  $\Phi$  but rather is technology dependent. Therefore it is not appropriate to construct an extra correlation between  $a$  and  $\Phi$  or  $d$  and  $\Phi$ , because then we would be incorporating economies of scale twice.

Oracle's Crystal Ball software has been used to perform 10,000 Monte Carlo simulation runs. The underlying data have finally been used for constructing a regression meta-model, whereby the NPV is modeled in terms of a linear combination of the input variables representing the main effects. The meta-model thus is a simplified approximation of the discounted cash flow model. The resulting equation can be used to have a quick glance at the most important variables. Decision makers can use this equation in order to get a first estimate of the economic feasibility.

Another possible approach to deal with uncertain cash flows, is the use of a risk-adjusted discount rate. Many economists, however, argue that the risk-free discount rate should be used for Monte Carlo simulations in order to avoid double-counting, as the risk aspects of the NPV are already summarized in the generated distribution (Aven 2003).

### **2.3 Plackett-Burman design**

Because the probabilities used in the Monte Carlo simulations are estimated on a subjective basis expressing our degrees of belief, Van Groenendaal and Kleijnen (1997) propose methods from design of experiments (DOE) as an alternative for Monte Carlo simulations, to provide information on which factors or independent variables can make an investment project "go wrong", without requiring knowledge of probability distributions. These independent variables are the same as the uncertain variables identified in step 3 of Aven's unifying approach. Because Van Groenendaal (1998) expects that decision makers are mainly interested in what can go wrong, he suggests to analyse changes in the

values of independent variables that have a negative impact on the dependent variable, i.e. the NPV. It is assumed that every factor or independent variable takes on either one of two values: -1 if the independent variable is “off” and +1 if the independent variable is “on”. In other words, +1 corresponds to the base-case value of the corresponding independent variable, whereas -1 stands for the value that has a negative influence on the dependent variable. In DOE the effect of changes in the value of the uncertain independent variables on the NPV, i.e. the dependent variable is thus obtained by simulating the extreme points of the value ranges, and estimating a linear regression meta-model to detect which independent variables are important (Van Groenendaal and Kleijnen 1997).

The most prevalent experimental designs are *one-factor-at-a-time*, *full factorial designs*, and *fractional designs*. Changing one factor at a time ignores combined effects. Fractional designs (e.g. Plackett-Burman designs) have been developed to limit the number of simulations compared to full factorial designs. For instance, given  $k$  independent variables and with every independent variable at two levels only, it requires  $2^k$  simulation runs for estimating  $k + 1$  effects (i.e.  $k$  main effects plus the overall mean), thus ten independent variables require  $2^{10} = 1,024$  simulations. It has been proved that  $k + 1$  observations suffice to estimate  $k + 1$  effects (Van Groenendaal and Kleijnen 1997). In other words, it suffices to simulate only a fraction  $2^{k-p}$  of the  $2^k$  possible observations so that  $2^{k-p} \geq k + 1$ . However, when the number of independent variables or factors becomes large, the number of simulation runs is still large (Van Groenendaal 1998). A class of designs that allows a more gradual increase in the number of simulation runs is the *Plackett-Burman design* type (Plackett and Burman 1946), which requires a number of runs equal to a multiple of four. Thus for ten independent variables, a Plackett-Burman design with twelve runs can be used. Therefore in this article the Plackett-Burman design has been applied following the approach of Van Groenendaal and Kleijnen for constructing a meta-model for the dependent variable, i.e. the NPV, and compared to the results from Monte Carlo simulations.

The results of the 12 runs of the Plackett-Burman designs required for 10 independent variables are represented in a table in which each column corresponds to one simulation run with a plus (+) sign reflecting the base-case value of the variable and the minus (-) sign reflecting the worst case value negatively impacting the NPV as the dependent variable. Each column hence can be interpreted as a

scenario, some of which may make economic sense, others being less likely (Van Groenendaal 1998). The tables of design are constructed in such a way that each independent variable is replicated at its base-case value the same number of times that it is replicated at its worst case value. Any combination of values of two independent variables also appears the same number of times. In a final run all the independent variables take on their worst case value (Plackett and Burman 1946). Identifying the base-case with only plus signs, means that all other runs focus on conditions that jeopardize the investment project (Van Groenendaal and Kleijnen 1997).

The disadvantage of the NPV's meta-model based on Plackett-Burman (PB) designs is that it can lead to erroneous conclusions in the presence of interaction effects. A suggested solution for avoiding biased estimates, is to augment the Plackett-Burman design with the Box-Wilson foldover. Such a foldover is obtained by adding the opposite design matrix to the original design matrix, so that 24 instead of 12 simulation runs are executed (Van Groenendaal 1998). One such Box-Wilson simulation run can be obtained by changing the signs of the corresponding Plackett-Burman simulation run. By applying the Box-Wilson foldover, an unbiased estimator of the main effects can be achieved (Van Groenendaal and Kleijnen 1997). Finally, the main effects are estimated by means of ordinary least squares regression using the NPV data of table 7. The meta-model that results from the Plackett-Burman and Box-Wilson designs is then compared to the model from Monte Carlo simulation.

The data concerning the independent and dependent variables have been generated by the techno-economic model in Excel. Next, the Monte Carlo simulations have been performed by means of the Excel add-in Crystal Ball. Furthermore, the simulations for the Plackett-Burman and Box-Wilson design have been executed by means of the same Excel as the one built for the techno-economic model. No additional software was needed to create the experimental design, as the latter is readily available in literature (see above). However, an input screen which is tailored to the experimental set-up has been developed in the same Excel in order to run the above mentioned simulations from the Plackett-Burman design and its Box-Wilson foldover. Finally, both the data from the Monte Carlo simulations and the experimental design are inserted into the statistical software package SPSS for running the meta-models.

### 3. Results

#### 3.1 Base-case

In this section the base-case assumptions related to the process parameters, the investment expenditure and the yearly cash flows during the lifetime of the pyrolysis plant are briefly explained. Next the NPV and the underlying cost structure and main revenue items are clarified.

##### 3.1.1 Fast pyrolysis of metal contaminated wood for the production of CHP

In the Belgian Campine more than 2,000 ha of farmland hold Cd concentrations exceeding guide values set by the Flemish Government (Schreurs et al. 2011). At least 650 ha of this farmland can be remediated by means of willow within a time span of more or less 40 years, although 2,400 ha is the most probable surface available for phytoextraction (with a maximum of 3,000 ha) (Kuppens et al. 2015). Cultivation of short rotation willow crops on 2,400 ha farmland would lead to an annual production of 19.2 kton dry biomass per year in the Belgian part of the Campine region, given an average biomass yield of 8 ton dry matter per hectare per year (Vangronsveld et al. 2009). Willow trees from a field experiment on a former maize field in Lommel (Belgium) had a Cd content of 24 mg kg<sup>-1</sup> and 60 mg kg<sup>-1</sup> (dry weight) in the twigs and leaves, respectively (Vangronsveld et al. 2009). This means that a fast pyrolysis plant that is operational during 7,000 hours per year (Bridgwater 2009a), will convert 2.7 ton dry biomass per hour.

During fast pyrolysis, biomass is rapidly heated in the absence of oxygen in a fluidized bed (Bridgwater 2012). This means that not real combustion, but only a thermal cracking of the long carbon molecules of the willow feedstock into smaller molecules takes place. Consequently, the vapors are rapidly quenched so that a dark brown liquid is formed with an energy content between 16 and 18 GJ/ton (Bridgwater 2005). This way, between 60 and 70 % of the original biomass weight can be converted into pyrolysis oil, whereas some 10 to 20 weight % is converted into a non-condensable biogas and another 10 to 20 weight % into the char which contains the heavy metals (Bridgwater et al. 2002). Lab-scale experiments on pyrolysis of willow samples from the field in Lommel showed that the Cd

concentration of pyrolysis oil is only 0.9 ppm at temperatures of 723 K. Whenever the samples are pyrolysed at a high temperature of 823 K the Cd is strongly volatilised with Cd concentrations up to 16 ppm in the pyrolysis oil (Stals et al. 2010). The oil can be burnt in a static engine for the production of CHP (which appears to be more profitable than only electricity production) (Kuppens et al. 2015), whereas the biogas is used for internal energy requirements. It is currently not clear whether there exists an economically viable application for the residual char. A promising option is the production of active coal in combination with recycling and mining of the heavy metals from the char (Kuppens et al. 2015). Currently it is supposed that the heavy metal containing char needs to be landfilled. A simplified mass and energy balance for the case study can be found in figure 1. For a detailed description of its underlying assumptions, we refer to Kuppens (2012).

[insert Fig. 1]

### 3.1.2 Investment expenditure

The investment expenditure consists of the expenditure for the pyrolysis plant and the investment cost of the CHP engine. As pyrolysis is a new technology, there are not a lot of cost data available (Rogers and Brammer 2012). Moreover, cost data for pyrolysis plants vary significantly (Uslu et al. 2008) and the capital cost of processes that have not been built are very uncertain (Bridgwater 2009b). Therefore, the proposed investment cost in year 0 ( $I_0$ ) of the pyrolysis reactor is the result of a meta-analysis of the capital cost for an investment in fast pyrolysis (Kuppens 2012). During the meta-analysis existing estimates for the capital costs of pyrolysis plants have been inventoried. The found capital costs can be either point estimates for a specific case or equations that are a function of the plant's scale which already aggregate existing data on capital cost estimates (Kuppens et al. 2015). All data have been joint to come to a final equation that can be used for preliminary plant cost estimations depending on the hourly amount of feedstock ( $\Phi$ ) that is converted:

$$I_{0,\text{pyr}} = 3.487 \times \Phi^{0.69} \quad (3)$$

With  $I_{0,\text{pyr}}$  = investment expenditure in year 0 of the pyrolysis plant (MEUR);

$\Phi$  = hourly input flow of willow feedstock (ton dry matter per hour).

It can be derived from the exponent in Eq. 3 that economies of scale are assumed. When the processing capacity  $\Phi$  doubles, the investment cost of the fast pyrolysis reactor increases only with a factor 1.6 ( $= 2^{0.69}$ ). The constant and the exponent of the investment expenditure equation however are uncertain: the constant is expected to fall between 2.697 and 4.286 with an expected value of 3.487 and the value of the exponent is believed to be between 0.65 and 0.74 with an expected value of 0.69 (Kuppens 2012). The capital cost of the CHP engine with de- $\text{NO}_x$ -technology is estimated to be 600 EUR  $\text{kW}_e^{-1}$ . The total capital cost of the fast pyrolysis plant and the CHP engine is represented table 1. Capital costs are expressed in current prices by means of the Chemical Engineering Plant Cost Index (CEPCI).

[insert Table 1]

### 3.1.3 Operational costs

Fixed annual operational costs represent overheads, maintenance (labour and materials), insurance, etc. and are generally expressed as a percentage of the initial investment expenditure (Wright et al. 2010). Bridgwater et al. (2002) count a total of 4.5 % of the capital cost as fixed operational costs, whereas Islam and Ani (2000) count 8 % for fixed operational costs. Wright et al. (2010) count more or less 5.5 % of total capital investment for fixed operational costs. Besides, Magalhães et al. (2009) expect a maintenance cost of 3 % of total capital investment. Given these figures, total fixed operational costs in this case study are set at 5 % of the total plant cost, with a minimum of 3 % and a maximum of 8 %.

Other operational costs are the purchase cost of the biomass (which includes the cost of planting, and harvesting), transport costs, pretreatment costs, labor costs, the landfill cost of the char and water consumption. Calculations for the Campine region yield a cultivation and harvesting cost between 30 and 70 EUR  $\text{t}_{\text{dm}}^{-1}$  with a most probable value of 50 EUR  $\text{t}_{\text{dm}}^{-1}$  (Kuppens 2012). The 2,400 ha of farmland dedicated to phytoextraction is spread over a region with a surface of 494  $\text{km}^2$  (Schreurs et al. 2011), so

that the average transportation distance of the willow equals 25 km round trip. The calculation of the transport cost of the willow biomass is based on the study of Voets et al. (2013) who built a transport cost model consisting of distance fixed and distance dependent transport costs assuming transport movements by means of a tractor-trailer. The expected transport cost according to this study is 7 EUR  $t_{dm}^{-1}$ .

Before willow can be pyrolyzed, it should be grinded into small particles of only a few mm and dried to a moisture content of ideally 7 % in order to avoid secondary reactions of the pyrolysis vapors (before condensation) with the formed char and aging of the pyrolysis oil respectively. Koppejan and de Boer-Meulman (2005) state that cutting the willow in small particles costs 10 EUR per fresh ton of willow. The pyrolysis gases provide the energy used in the drying process, which has been reported in Rogers and Brammer (2012) and Kuppens (2012), including the cost of a pilot fuel. Staffing levels have been based on Thornley et al. (2008) who calculated the potential for job creation based on several bioenergy systems. Wages are expected to be around 56.5 kEUR  $yr^{-1}$  in the sector of bioenergy production (Kuppens 2012). Make-up water (the loss of cooling water through evaporation that should be replenished) consumed is based on a techno-economic evaluation of a bubbling fluidized bed pyrolysis unit and equals 0.1 tonne of water per tonne of feedstock at a cost of 0.77 EUR  $m^{-3}$  (Kuppens 2012). Finally, the total cost of landfilling industrial waste is set at 122 EUR per ton char (Kuppens et al. 2011).

#### 3.1.4 Revenues

Revenues consist of the investment allowance subsidy, the sales and savings of electricity and heat, and the policy support in the form of sales of green power and heat and power certificates. Environment friendly investments receive an investment allowance of 13.5 % of the capital cost in Belgium. Electricity might be sold to the grid at prices between 60 and 80 EUR  $MWh_e^{-1}$  (Kuppens 2012), whereas heat savings are expected to be worth 20 EUR  $MWh_e^{-1}$  (Voets et al. 2011). In Flanders, green power certificates are awarded for electricity produced from renewable energy sources. The exact number of green power certificates awarded per  $MWh_e$  has depends on the profitability (indicated by the

“unprofitable top” and “banding factor”) for reference installations in several representative project categories. These indicators for the profitability of a biomass plant are recalculated yearly and might thus change over time. For new incineration installations of fixed biomass that become operational after 1<sup>st</sup> January 2017 this banding factor corresponds to 1, which in turn corresponds to 97 EUR MWh<sub>e</sub><sup>-1</sup> per green power certificate. Therefore, it is assumed that pyrolysis of fixed biomass will also yield more or less 100 EUR MWh<sub>e</sub><sup>-1</sup> per green power certificate, with a minimum of 80 EUR MWh<sub>e</sub><sup>-1</sup> and a maximum of 120 EUR MWh<sub>e</sub><sup>-1</sup> (Kuppens 2012). An analogous policy support system exists for the combined production of heat and electricity with heat and power certificates that are awarded for the amount of primary energy savings (PES). It is expected that the heat and power certificates will yield 31 EUR MWh<sub>PES</sub><sup>-1</sup> and 45 EUR MWh<sub>PES</sub><sup>-1</sup> with a most expected value of 35 EUR MWh<sub>PES</sub><sup>-1</sup> (Kuppens 2012).

### 3.1.5 NPV

The cash flows generated by an investment of 10.7 MEUR for a fast pyrolysis plant that converts willow at 2.74 t<sub>dm</sub> h<sup>-1</sup> for the combined production of electricity and heat with a net electric capacity of 5.5 MW<sub>e</sub>, result in a positive NPV over 20 years of 3.0 MEUR, i.e. for the base-case assumptions the investment in a fast pyrolysis plant for the valorization of phytoextracting crops appears to be profitable with an internal rate of return of 6 %. The expected cash flows for year 1 are reproduced in table 2.

The capital cost (which represents the annualized investment expenditure) is the most important expenditure with a share of 30 % of the total. The second most important is the purchase cost of the biomass with a share of 20 % of total expenditure. The variable cost of the CHP engine amounts up to 19 % of total expenditure. The transport costs are quite low, due to the fact that the biomass only needs to be delivered from a small local contaminated region. Other expenditure items each account for less than 10 % of total expenditure.



When revenues are considered, the green power certificates catch the eye: they make up 46 % of total revenues. If the systems of both green power and heat and power certificates would be abolished, a total of 61 % of all revenues would be lost and result in bankruptcy for the pyrolysis plant.

### 3.1.6 Scale of operation

It has already been stated that economies of scale have been taken into account in the investment expenditure. Other economies of scale are present in fixed costs, the operational costs of the CHP and staff costs. The scale of operation greatly influences the profitability of an investment in a fast pyrolysis plant, as illustrated by figure 2 where the lines represent total revenues and the bars represent total costs. If only 650 ha of farmland would be remediated, then NPV would be slightly negative, i.e. -0.4 MEUR while in the base-case conversion of the biomass yield of 2,400 ha of farmland would result in a NPV of 3.0 MEUR which rises to 4.4 MEUR if 3,000 ha of farmland would be available.

[insert Fig. 2]

[insert Table 2]

## 3.2 Monte Carlo simulations

It is uncertain that the NPV of an investment in the fast pyrolysis plant will be 3.0 MEUR. At first, 14 variables were allowed to change to the same extent (+ or – 10 %) and according to realistic ranges for the variables' values, but the NPV was not very sensitive to the fixed operational cost of the fast pyrolysis reactor, the price of the make-up water, the landfill cost per tonne of char, and the price of heat. As a consequence, only the values of the 10 variables stated in table 3 were allowed to change during Monte Carlo simulations within their indicated ranges.

[insert Table 3]

Under the above stipulated assumptions and uncertainties, there is a 87 % chance of a positive NPV. The mean NPV equals 3.2 MEUR which is close to the base-case NPV of 3.0 MEUR. The standard deviation equals 3.1 MEUR. A summary of the Monte Carlo statistics can be found in table 4.

[insert Table 4]

In figure 3 one can see the contribution of the uncertainty of each variable to the variance of the NPV. A positive percentage indicates that an increase in the value of a variable augments the NPV. For example, if more farmland is available for phytoextraction, economies of scale come into play as was stated in paragraph 3.1.6 “*Scale of operation*” and illustrated in figure 2. Here the presence of economies of scale is confirmed because of the positive relationship between available farmland and the NPV. The investment exponent (which equals 0.69 in Eq. 3) has a slightly negative influence on the NPV: a higher exponent increases the investment cost and hence lowers the NPV. A higher investment exponent also reflects less economies of scale. The most important variables influencing the NPV are: available farmland (i.e. the scale of operation), the willow biomass yield, the product yield (oil yield), the market prices of the green power certificates, the willow purchase cost and the electricity price. Together the uncertainty of the first four variables explains more than 70 % of the total variance in the NPV.

[insert Fig.3]

Finally, the numerical values for the input variables in the Monte Carlo simulations (drawn at random from their assumed probability distributions) are inserted into a meta-regression model. The coefficients of this model can be found in table 5. This model can now be used to estimate the NPV of a specific scenario. For example, if one wants to calculate the NPV for the base-case, just fill out the base-case values of table 3. The signs of the coefficients correspond to the signs of the contribution of each variable to the variance of the NPV illustrated in figure 3. All coefficients are statistically significantly different from zero at a 5 % significance level and the ranking of the variables according to their standardized coefficients corresponds to the ranking from Fig. 2.

[insert Table 5]

### 3.3 Plackett-Burman designs

The same uncertainties have been investigated by means of 12 Plackett-Burman designs and 12 Box-Wilson foldover designs. The results of the design are represented in table 7. The 12<sup>th</sup> run of the Box-Wilson foldover every independent variable takes its base-case value, and hence the NPV (dependent variable) of this 12<sup>th</sup> run corresponds to the NPV of the base-case of 3.0 MEUR.

The meta-regression model of these 24 runs is represented by table 6. The coefficients in this table should be interpreted somewhat differently compared to the ones from the Monte Carlo simulations in table 5. Here, if the independent variable  $y_{GPC}$  changes from -1 to +1, i.e. when the policy support system yields 100 EUR MWh<sub>e</sub><sup>-1</sup> instead of 80 EUR MWh<sub>e</sub><sup>-1</sup>, the NPV (dependent variable) will increase with 797 kEUR, i.e. the unstandardized coefficient of  $y_{GPC}$  in table 6. The unstandardized coefficient from the Monte Carlo simulations in table 5 is lower and cannot be compared because it is related to the independent variable  $x_{GPC}$  instead of  $y_{GPC}$ . It means that, when  $x_{GPC}$  increases with 1, in other words when the policy support scheme yields 1 EUR MWh<sub>e</sub><sup>-1</sup> extra, the NPV (dependent variable) augments with 154 kEUR, i.e. the unstandardized coefficient of  $x_{GPC}$  in table 5.

The first thing to note is that none of the coefficients is significant at the 0.01 level. Only 3 coefficients are significant at the 0.05 level: the coefficients linked to the independent variables (i) available farmland, (ii) sales price of the green power certificates and (iii) oil yield. It is striking that the sign of the estimator of the main effect of the available farmland does not correspond to the sign this independent variable has in table 5. This can be explained by the huge difference in available farmland that the -1 value represents compared to the +1 value: when the independent variable  $y_{ha}$  equals -1 it actually represents a case where the minimal farmland is 650 ha, compared to 2,400 ha when  $y_{ha}$  equals +1. When there is only 650 ha of farmland available, the scale of the plant might be too low in order to be realistic and hence the effect of the available farmland might not be representative for realistic cases. Comparing table 5 and 6, one can see also differences in the signs of the coefficients for the independent

variables (i) willow purchase cost, (ii) investment constant and (iii) investment exponent. The difference in sign can be expected, as the Plackett-Burman simulations measure the effect of changing the independent variable  $y_{\text{wilpur}}$  from -1 to +1, i.e. from the extreme value negatively impacting the NPV (or the maximal value of 70 EUR  $t_{\text{dm}}^{-1}$  in table 3) to the base-case value of 50 EUR  $t_{\text{dm}}^{-1}$ . The NPV (dependent variable) should be higher if  $y_{\text{wilpur}}$  (independent variable) equals +1 compared to -1, and that corresponds to the positive sign of the standardized coefficient of 0.303 in table 6. This appears to contrast with the negative sign of the standardized coefficient of -0.299 in table 5 but it is not: the effect of the unit willow purchase cost is measured differently during Monte Carlo simulations by means of the independent variable  $x_{\text{wilpur}}$ . In the base-case  $x_{\text{wilpur}}$  takes the value of 50 EUR  $t_{\text{dm}}^{-1}$ : when the purchase cost increases, i.e. when  $x_{\text{wilpur}}$  augments, this higher purchase cost results in a lower NPV as indicated by the minus sign of -0.299 in table 5. Although the signs differ in both tables, it (counter-intuitively) represents the same effect. Finally, one can see that the standardized coefficients in table 6 have the same order of magnitude compared to the ones in table 5 (except the standardized coefficient of the willow yield).

[insert Table 6]

[insert Table 7]

#### 4. Conclusion and Discussion

The base-case economic model indicated that the NPV of an investment in fast pyrolysis is positive, which means that the revenues are high enough to recuperate the production cost of 180.96 EUR  $MWh^{-1}$  of electricity (= the total yearly expenditure of 5,545,241 EUR – see table 2 - divided by the product of the gross electric capacity of 5.5  $MW_e$  and the 5,000 operation hours of the CHP engine). The base-case values however are highly uncertain. First, these uncertainties have been studied by Monte Carlo simulations. Under current knowledge, there is a 87 % chance of a positive NPV. The problem with Monte Carlo simulations is that the assumed probability distributions are often unknown and hence represent the best guess of the expert and hence might differ from reality.

The Plackett-Burman design and its Box-Wilson foldover are suggested as an alternative for estimating risk. The problem with the Plackett-Burman design is that they are more difficult to interpret: as the variables either take a value of +1 or -1, the estimator of the main effect is not comparable to the estimator found during Monte Carlo simulations. The standardized coefficients however have more or less the same magnitude, but are often not significant. Another problem is that the Plackett-Burman technique only focuses on the extreme values of the ranges found in literature. Whereas in Monte Carlo simulations a random selection of variable values is applied, Plackett-Burman designs result in non-random scenarios. The result of this may be that some factors are over- or underemphasized for decision making (Van Groenendaal and Kleijnen 2002), although information on the extremes is valuable for decision makers. It is suggested that both Monte Carlo and Plackett-Burman simulations provide complementary information for decision makers. The focus for the Plackett-Burman design should not be on the meta-model, but on the possible outcomes of the NPV: they indicate the maximal losses an investor can run. It is believed that for the main effects the meta-model of the Monte Carlo simulations is better suited.

In our opinion, design of experiments is helpful to gain a first understanding of the problem and does not fully grasp economic risk as these techniques are only concerned with the worst case values of the input variables of the techno-economic model. There are two important drawbacks: only two values are being used for each variable, where they could, in fact, take any number of values; and no recognition is being given to the fact that the base-case value is much more likely to occur than the extreme values having a negative impact on the NPV.

## REFERENCES

- Aven T (2003) *Foundations of risk analysis. A knowledge and decision-oriented perspective*. Chichester: John Wiley & Sons.
- Aven T, Nilsen EF, Nilsen, T (2004). Expressing economic risk - review and presentation of a unifying approach. *Risk Analysis* 24(4): 989-1005.
- Aydinli B, Caglar A, Pekol S, Karaci A (2017) The prediction of potential energy and matter production from biomass pyrolysis with artificial neural network. *Energy Exploration & Exploitation* 35(6): 698-712.
- Bridgwater (Ed.) (2005) *Fast pyrolysis of biomass: a handbook*. Newbury (UK): CPL Press.
- Bridgwater AV (2009a) Technical and economic assessment of thermal processes for biofuels.
- Bridgwater AV (2009b) Technical and Economic Assessment of Thermal Processes for Biofuels. NNFCC project 08/018. COPE Ltd.
- Bridgwater AV (2012). Review of fast pyrolysis of biomass and product upgrading. *Biomass and bioenergy* 38: 68-94.
- Bridgwater AV, Toft A, Brammer J (2002) A techno-economic comparison of power production by biomass fast pyrolysis with gasification and combustion. *Renewable and sustainable energy reviews* 6: 181-248.
- Brown TR, Thilakaratne R, Brown RC, Hu G (2013) Techno-economic analysis of biomass to transportation fuels and electricity via fast pyrolysis and hydroprocessing. *Fuel* 106: 463-469.
- Brown TR, Wright MM (2014) Techno-economic impacts of shale gas on cellulosic biofuel pathways. *Fuel* 117 (Part B): 989-995.
- Diebold J, Milne T, Oasmaa A, Bridgwater AV, Cuevas A, et al. (1999) Proposed specifications for various grades of pyrolysis oils. In A. V. Bridgwater (Ed.), *Fast pyrolysis of biomass: a handbook* (Vol. 1, pp. 102-114). Newbury (UK): CPL Press.
- Ensley BD (2000) Rationale for use of phytoremediation. In I. Raskin, & B. D. Ensley (Eds.), *Phytoremediation of Toxic Metals Using Plants to Clean Up the Environment* (pp. 3-11). New York: John Wiley & Sons, Inc.

- Gadallah M (2011) An alternative to Monte Carlo simulation method. *International Journal of Experimental Design and Process Optimisation* 2(2): 93-101.
- Haahtela TJ (2010) Regression sensitivity analysis for cash flow simulation based real option valuation. *Procedia Social and Behavioral Sciences* 2: 7670-7671.
- Haimes YY (2004) *Risk modeling, assessment, and management* (Wiley Series in System Engineering and Management ). Hoboken (New Jersey): John Wiley & Sons.
- Hertz DB (1979) Risk analysis in capital investment. *Harvard Business Review*, 57(5), 95-106.
- Hsu DD (2012) Life cycle assessment of gasoline and diesel produced via fast pyrolysis and hydroprocessing. *Biomass Bioenerg*, 45:41-7.
- Hu Wenhao (2015) Techno-economic, uncertainty, and optimization analysis of commodity product production from biomass fast pyrolysis and bio-oil upgrading. Graduate theses and Dissertations. Paper 14400.
- Islam, M. N., & Ani, F. N. (2000). Techno-economics of rice husk pyrolysis, conversion with catalytic treatment to produce liquid fuel. *Bioresource Technology*, 73, 67-75.
- Karaci A, Caglar A, Aydinli B, Pekol S (2016) The pyrolysis process verification of hydrogen rich gas (H-rG) production by artificial neural network (ANN). *International Journal of Hydrogen Energy* 41: 4570-4578.
- Kazantzi V, El-Halwagi AM, Kazantzis N, El-Halwagi MM (2013) Managing uncertainties in a safety-constrained process system for solvent selection and usage: an optimization approach with technical, economic, and risk factors. *Clean Technologies and Environmental Policy* 15 (2): 213–224.
- Khalid S, Shahid M, Khan Niazi N, Murtaza B, Bibi I, et al. (2017) A comparison of technologies for remediation of heavy metal contaminated soils. *Journal of Geochemical Exploration*, 182: 247 - 268.
- Koppejan J, de Boer-Meulman P (2005) De verwachte beschikbaarheid van biomassa in 2010. (pp. 60). Utrecht: SenterNovem.
- Kuppens M, Umans L, Werquin W, Thibau B, Smeets K, Vangilbergen B (2011) Tarieven en capaciteiten voor storten en verbranden. Actualisatie tot 2010. Mechelen: OVAM

- Kuppens T (2012) *Techno-economic assessment of fast pyrolysis for the valorisation of short rotation coppice cultivated for phytoextraction*. Hasselt University, Diepenbeek.
- Kuppens T, Cornelissen T, Carleer R, Yperman J, Schreurs S, Jans M, et al. (2010) Economic assessment of flash co-pyrolysis of short rotation coppice and biopolymer waste streams. *Journal of Environmental Management*, 91, 2736-2747.
- Kuppens T, Thewys T (2010) *Economics of flash pyrolysis of short rotation willow from phytoextraction*. Paper presented at the 18th European Biomass Conference and Exhibition, from Research to Industry and Markets, Lyon, May 3-7, 2010
- Kuppens T, Van Dael M, Vanreppelen K, Thewys T, Yperman J, Carleer R, et al. (2015) Techno-economic assessment of fast pyrolysis for the valorization of short rotation coppice cultivated for phytoextraction (2015) *Journal of Cleaner Production* 88, 336-344, doi:10.1016/j.jclepro.2014.07.023.
- Lewandowski I, Schmidt U, Londo M, Faaij A (2006) The economic value of the phytoremediation function - Assessed by the example of cadmium remediation by willow (*Salix* spp). *Agricultural Systems* 89: 68-89.
- Li Boyan (2015) Techno-economic and uncertainty analysis of fast pyrolysis and gasification for biofuel production. Graduate theses and Dissertations. 14932. <http://lib.dr.iastate.edu/etd/14932>.
- Magalhães AI, Petrovic D, Rodriguez AL, Adi Putra Z, Thielemans G (2009) Techno-economic assessment of biomass pre-conversion processes as a part of biomass-to-liquids line-up. *Biofuels, Bioproducts and Biorefining* 3: 584-600.
- Mishra S, Khasnabis S, Swain S (2015) Incorporating uncertainty and risk in transportation investment decision-making. *Transportation Planning and Technology* 38:7, 738-760
- Nkrumah PN, Baker AJM, Chaney RL, Erskine PD, Echevarria G, Morel JL, et al. (2016) Current status and challenges in developing nickel phytomining: an agronomic perspective. *Plant Soil* 406: 55-69.
- Novo LB, Mahler CF, González L (2015) Plants to harvest rhenium: scientific and economic viability. *Environmental Chemistry Letters* 13(4): 439-445.



- Ochelen, S., & Putzeijs, B. (2008). Milieubeleidskosten - Begrippen en berekeningsmethoden. Brussels: Environment, Nature and Energy Department of the Flemish Government.
- Olden JD, Joy MK, Death RG (2004) An accurate comparison of methods for quantifying variable importance in artificial neural networks using simulated data. *Ecological Modelling* 178: 389-397.
- Plackett R, Burman J (1946) The design of optimum multifactorial experiments. *Biometrika* 33(4): 305-325.
- Rentsch L, Aubel IA, Schreiter N, Höck M, Bertau M (2016) PhytoGerm: Extraction of germanium from biomass – An economic pre-feasibility study. *Journal of Business Chemistry* 13(1): 47-58.
- Rogers JG, Brammer JG (2012) Estimation of the production cost of fast pyrolysis bio-oil. *Biomass and bioenergy* 36: 208-217.
- Savvides SC (1994) Risk analysis in investment appraisal. *Project Appraisal* 9(1): 3-18.
- Schreurs E, Voets T, Thewys T (2011) GIS-based assessment of the biomass potential from phytoremediation of contaminated agricultural land in the Campine region in Belgium. *Biomass and bioenergy* 35(10): 4469-4480.
- Siemons RV (2002) *A development perspective for biomass-fuelled electricity generation technologies. Economic technology assessment in view of sustainability*. Universiteit van Amsterdam, Amsterdam.
- Stals M, Thijssen E, Vangronsveld J, Carleer R, Schreurs S, Yperman J (2010) Flash pyrolysis of heavy metal contaminated biomass from phytoremediation: Influence of temperature, entrained flow and wood/leaves blended pyrolysis on the behaviour of heavy metals. [Article]. *Journal of Analytical and Applied Pyrolysis*, 87(1), 1-7, doi:10.1016/j.jaap.2009.09.003.
- Thornley P, Rogers JG, Huang JW (2008) Quantification of employment from biomass power plants. *Renewable Energy* 33: 1922-1927.
- Uslu A, Faaij APC, Bergman PCA (2008) Pre-treatment technologies, and their effect on international bioenergy supply chain logistics. Techno-economic evaluation of torrefaction, fast pyrolysis and pelletisation. *Energy* 33: 1206-1223.

- van der Ent A, Baker AJM, van Balgooy MMJ, Tjoa A (2013) Ultramafic nickel laterites in Indonesia (Sulawesi, Halmahera): Mining, nickel hyperaccumulators and opportunities for phytomining. *Journal of Geochemical Exploration* 128: 72-79.
- Van Groenendaal WJ (1998) Estimating NPV variability for deterministic models. *European Journal of Operational Research* 107: 202-213.
- Van Groenendaal WJ, Kleijnen JP (1997) On the assessment of economic risk: factorial design versus Monte Carlo methods. *Reliability Engineering and System Safety* 57: 91-102.
- Van Groenendaal WJ, Kleijnen JP (2002) Deterministic versus stochastic sensitivity analysis in investment problems: An environmental case study. *European Journal of Operational Research* 141: 8-20.
- Vangronsveld J, Herzig R, Weyens N, Boulet J, Adriaensen K, Ruttens A, et al. (2009) Phytoremediation of contaminated soils and groundwater: lessons from the field. *Environ Sci Pollut Res.* 16: 765-794.
- Vassilev A, Schwitzguébel J-P, Thewys T, Van der Lelie D, Vangronsveld J (2004) The use of plants for remediation of metal-contaminated soils. *The Scientific World Journal* 4: 9-34.
- Voets T, Kuppens T, Thewys T (2011) Economics of electricity and heat production by gasification or flash pyrolysis of short rotation coppice in Flanders (Belgium). *Biomass and Bioenergy* 35(5): 1912-1924.
- Voets T, Neven A, Thewys T, Kuppens T (2013) GIS-based location optimization of a biomass conversion plant on contaminated willow in the Campine region (Belgium). *Biomass and bioenergy* 55: 339-349.
- Vose D (2000) *Risk analysis - a quantitative guide*. Chichester: John Wiley & Sons.
- Wright MM, Satrio JA, Brown RC, Daugaard DE, Hsu DD (2010) *Techno-Economic Analysis of Biomass Fast Pyrolysis to Transportation Fuels*. Golden, Colorado (USA): National Renewable Energy Laboratory (NREL).

Yang Y, Ge Y, Zeng H, Zhou X, Peng L, Zeng Q (2017) Phytoextraction of cadmium-contaminated soil and potential of regenerated tobacco biomass for recovery of cadmium. *Scientific Reports* 7: 7210. doi:10.1038/s41598-017-05834-8.

Yatim P, Sue Lin N, Lam HL, Ah Choy E (2017) Overview of the key risks in the pioneering stage of the Malaysian biomass industry. *Clean Technologies and Environmental Policy*, pp 1–15. <https://link.springer.com/article/10.1007/s10098-017-1369-2>.

**Table 1** Total capital cost of the fast pyrolysis plant

Processing capacity	2.74 t <sub>dm</sub> h <sup>-1</sup>
Gross electric power	5.5 MW <sub>e</sub>
Capital cost pyrolysis reactor	7.0 MEUR
Capital cost CHP engine	3.7 MEUR
Total plant cost	10.7 MEUR

**Table 2** Expected cash flows for a fast pyrolysis plant in the Belgian Campine converting 2.74 t<sub>dm</sub> h<sup>-1</sup> in year 1

Expenditure/revenue item	Amount (EUR)	Share of total expenditure/revenue (%)
<b>Total expenditure</b>	<b>4,818,725</b>	<b>100 %</b>
Capital cost	1,345,311	28 %
Fixed costs pyrolysis	350,221	7 %
Variable cost CHP	891,698	19 %
Biomass purchase cost	960,000	20 %
Biomass transport cost	134,400	3 %
Biomass pretreatment cost	192,000	4 %
Staff cost	282,500	6 %
Char landfill cost	289,837	6 %
Water consumption	1,478	0 %
Pilot fuel	371,280	8 %
<b>Total revenues</b>	<b>5,545,241</b>	<b>100 %</b>
Electricity sales	1,863,963	34 %
Heat sales	214,737	4 %
Green power certificates	2,534,133	46 %
Heat and power certificates	932,408	15 %

**Table 3** Uncertainty ranges for Monte Carlo simulations

Variable	Symbol	Values		
		Minimal	Base-case	Maximal
Available farmland	$x_{ha}$	650 ha	2,400 ha	3,000 ha
Willow yield	$x_{tdm}$	$5 \text{ t}_{dm} \text{ ha}^{-1} \text{ yr}^{-1}$	$8 \text{ t}_{dm} \text{ ha}^{-1} \text{ yr}^{-1}$	$15 \text{ t}_{dm} \text{ ha}^{-1} \text{ yr}^{-1}$
Oil yield	$x_{oil\%}$	60 %	65 %	70 %
Sales price green power certificates	$x_{GPC}$	80 EUR MWh <sub>e</sub> <sup>-1</sup>	100 EUR MWh <sub>e</sub> <sup>-1</sup>	120 EUR MWh <sub>e</sub> <sup>-1</sup>
Sales price heat and power certificates	$x_{HPC}$	31 EUR MWh <sub>PEB</sub> <sup>-1</sup>	35 EUR MWh <sub>PEB</sub> <sup>-1</sup>	45 EUR MWh <sub>PEB</sub> <sup>-1</sup>
Sales of electricity	$x_{elec}$	60 EUR MWh <sub>e</sub> <sup>-1</sup>	70 EUR MWh <sub>e</sub> <sup>-1</sup>	80 EUR MWh <sub>e</sub> <sup>-1</sup>
Willow purchase cost	$x_{wilpur}$	30 EUR t <sub>dm</sub> <sup>-1</sup>	50 EUR t <sub>dm</sub> <sup>-1</sup>	70 EUR t <sub>dm</sub> <sup>-1</sup>
LHV of pyrolysis oil	$x_{LHV}$	16 GJ t <sup>-1</sup>	17 GJ t <sup>-1</sup>	18 GJ t <sup>-1</sup>
Investment constant	$x_{cst}$	2.697	3.487	4.286
Investment exponent	$x_{exp}$	0.6267	0.6914	0.7799

**Table 4** Summary statistics of the Monte Carlo simulations

Statistic	Forecast values
Trials	10,000
Base-case	3.0 MEUR
Mean	3.2 MEUR
Standard Deviation	3.1 MEUR
Minimum	-3.8 MEUR
Median	2.7 MEUR
Maximum	20.8 MEUR

**Table 5** Coefficients of the regression analysis based on the Monte Carlo simulations

Variable	Symbo l	Unstandardized coefficient	Standardized coefficient
(Constant)		-77,793,759.83	
Available farmland	X <sub>ha</sub>	2,911.15	0.460***
Willow purchase cost	X <sub>wilpur</sub>	-114,346.07	-0.229***
Investment constant	X <sub>cst</sub>	-2.21	-0.228***
Investment exponent	X <sub>exp</sub>	-7,608,214.81	-0.076***
LHV of pyrolysis oil	X <sub>LHV</sub>	1,299.43	0.171***
Sales of electricity	X <sub>elec</sub>	156,955.56	0.205***
Sales price of green power certificates	X <sub>GPC</sub>	153,622.95	0.403***
Sales price of heat and power certificates	X <sub>HPC</sub>	141,866.01	0.133***
Willow yield	X <sub>tdm</sub>	640,138.27	0.425***
Oil yield	X <sub>oil%</sub>	52,617,305.83	0.347***




**Table 6** Coefficients of the regression analysis based on the Plackett-Burman and Box-Wilson simulations

Variable	Symbol	Unstandardized coefficient	Standardized coefficient
(Constant)		-2,776,261.83	
Available farmland	$y_{ha}$	-869,991.40	-0.420*
Willow purchase cost	$y_{wilpur}$	627,176.98	0.303
Investment constant	$y_{cst}$	546,064.11	0.264
Investment exponent	$y_{exp}$	59,127.00	0.029
LHV of pyrolysis oil	$y_{LHV}$	317,356.80	0.153
Sales of electricity	$y_{elec}$	467,979.00	0.226
Sales price green power certificates	$y_{GPC}$	797,135.41	0.385*
Sales price heat and power certificates	$y_{HPC}$	230,059.96	0.111
Willow yield	$y_{tdm}$	-318,238.37	-0.154
Oil yield	$y_{oil\%}$	696,530.53	0.337*


**Table 7** Results of the Plackett-Burman design and Box-Wilson foldover

Variable	Symbol	PB1	PB2	PB3	PB4	PB5	PB6	PB7	PB8	PB9	PB10	PB11	PB12
Available farmland	$y_{ha}$	+	+	-	+	+	+	-	-	-	+	-	-
Willow purchase cost	$y_{wilpur}$	-	+	+	-	+	+	+	-	-	-	+	-
Investment constant	$y_{est}$	+	-	+	+	-	+	+	+	-	-	-	-
Investment exponent	$y_{exp}$	-	+	-	+	+	-	+	+	+	-	-	-
LHV of pyrolysis oil	$y_{LHV}$	-	-	+	-	+	+	-	+	+	+	-	-
Sales of electricity	$y_{elec}$	-	-	-	+	-	+	+	-	+	+	+	-
Sales price green power certificates	$y_{GPC}$	+	-	-	-	+	-	+	+	-	+	+	-
Sales price heat and power certificates	$y_{HPC}$	+	+	-	-	-	+	-	+	+	-	+	-
Willow yield	$y_{tdm}$	+	+	+	-	-	-	+	-	+	+	-	-
Oil yield	$y_{oil\%}$	-	+	+	+	-	-	-	+	-	+	+	-
NPV Plackett-Burman run (MEUR)		-5.3	-4.6	-1.8	-3.5	-3.3	-2.8	-1.7	-1.5	-3.3	-2.5	-0.7	-2.3


NPV Box-Wilson foldover (MEUR)	-2.0	-1.0	-4.3	-2.2	-2.1	-2.7	-5.0	-6.7	-1.7	-1.5	-7.0	+3.0
--------------------------------	------	------	------	------	------	------	------	------	------	------	------	------

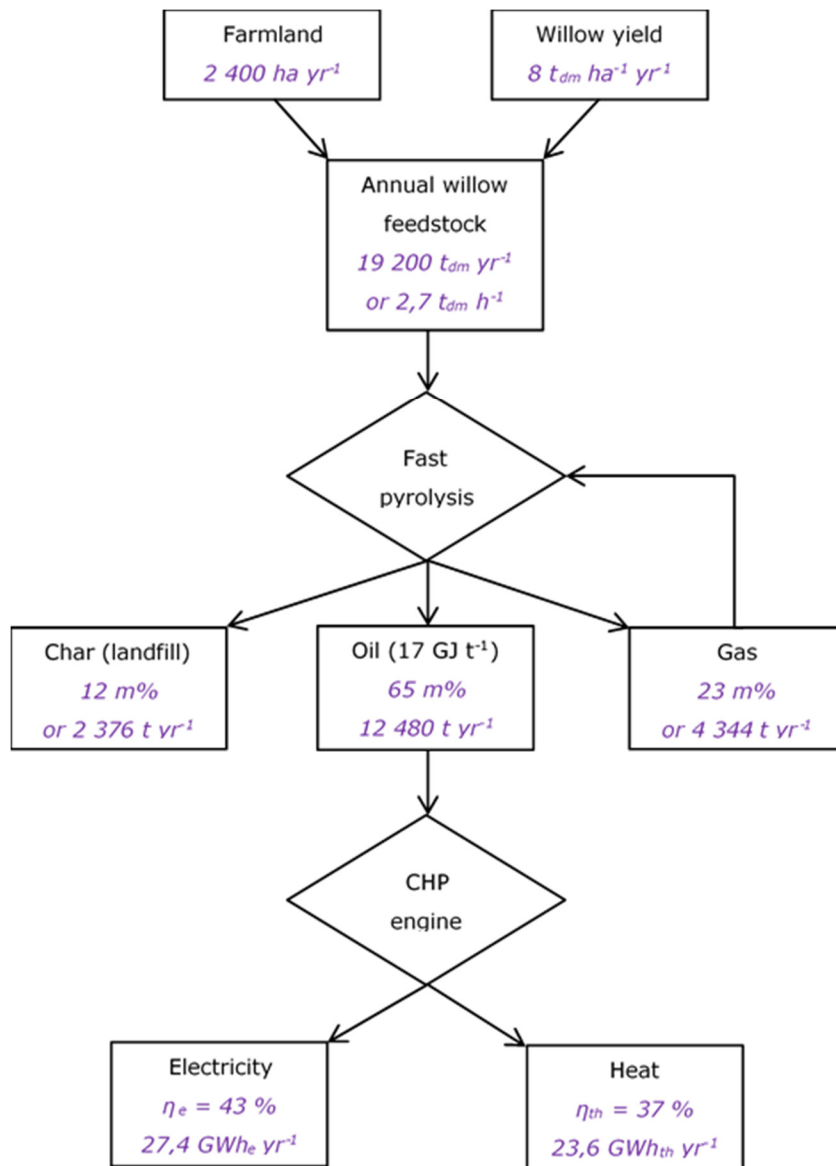

**Fig. 1** Simplified mass and energy balance of the fast pyrolysis case study

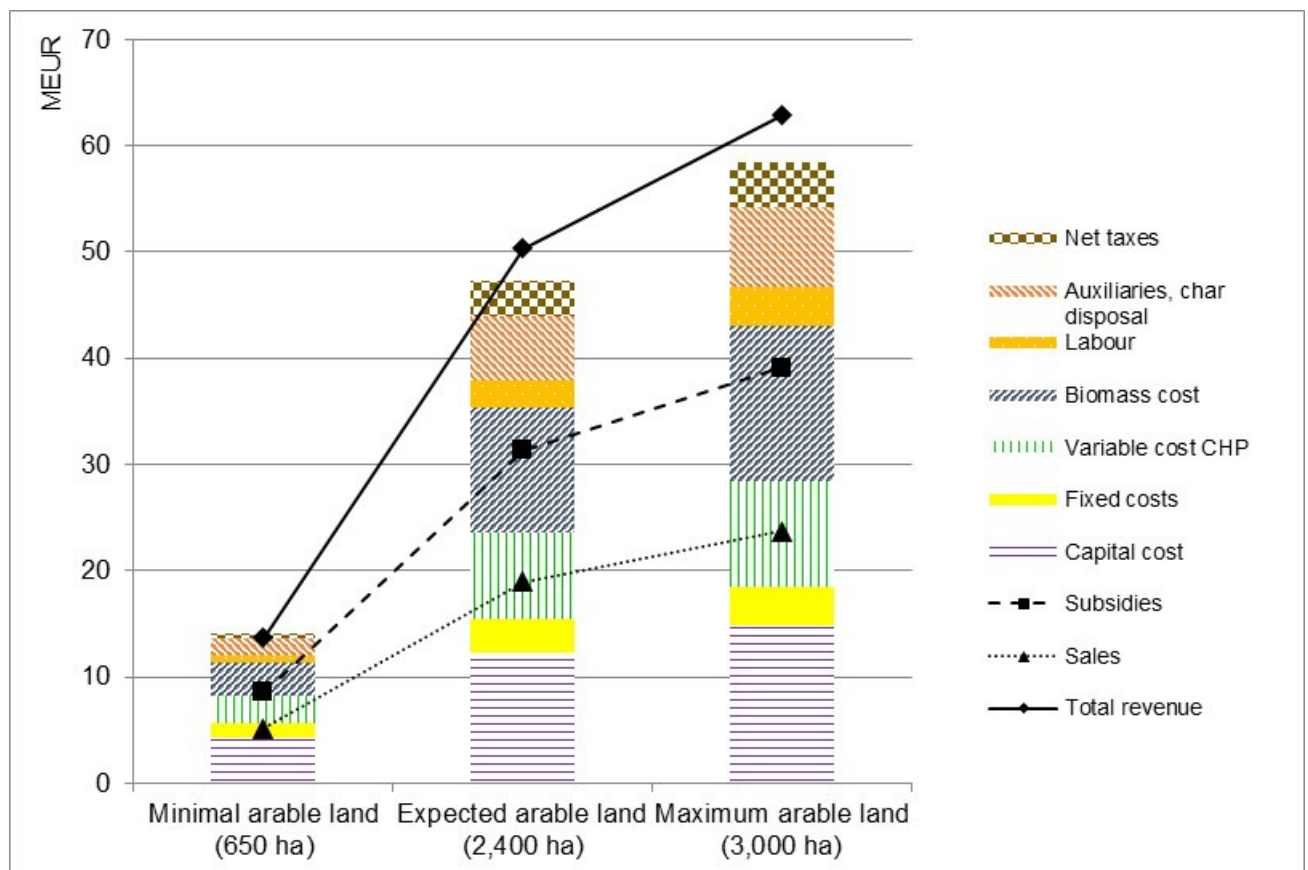

**Fig. 2** Influence of scale on total capital cost, operational costs and revenues

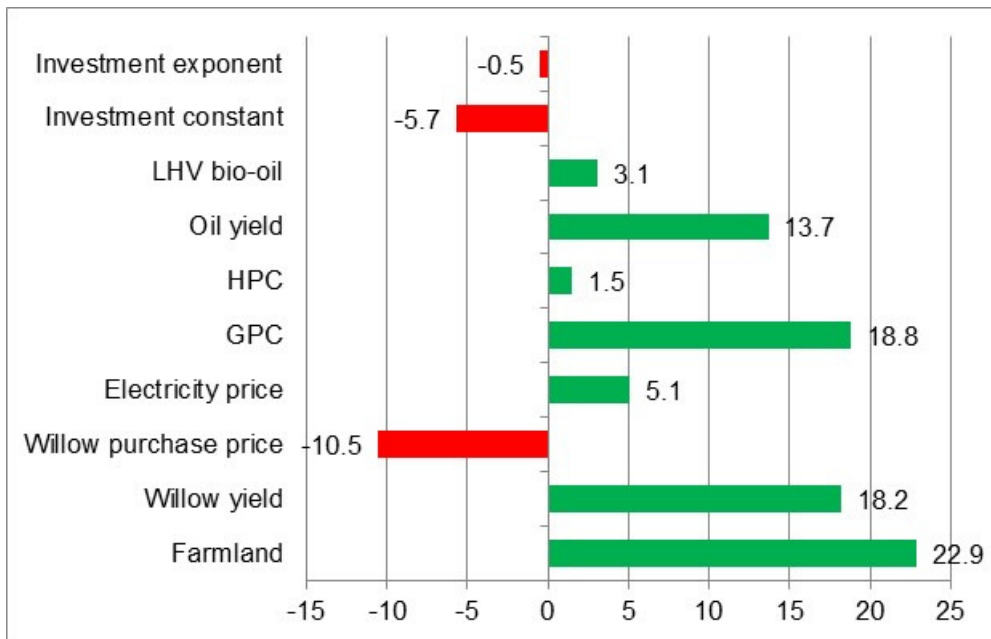

**Fig. 3** Sensitivity analysis – contribution to variance of the NPV