

The relationship between impact speed and the probability of pedestrian fatality during a vehicle-pedestrian crash: A systematic review and meta-analysis
Peer-reviewed author version

HUSSAIN, Qinaat; Feng, Hanqin; Grzebieta, Raphael; BRIJS, Tom & Olivier, Jake
(2019) The relationship between impact speed and the probability of pedestrian fatality during a vehicle-pedestrian crash: A systematic review and meta-analysis. In: Accident Analysis and Prevention, 129, p. 241-249.

DOI: 10.1016/j.aap.2019.05.033

Handle: <http://hdl.handle.net/1942/28369>

The relationship between impact speed and the probability of pedestrian fatality during a vehicle-pedestrian crash: a systematic review and meta-analysis

Qinaat Hussain

Qatar University – Qatar Transportation and Traffic Safety Center, College of Engineering,
P.O.Box 2713, Doha, Qatar
Uhasselt, Transportation Research Institute (IMOB), Agoralaan, 3590 Diepenbeek, Belgium &
Tel: +974(0)33 53 11 96 Email: qinaat.hussain@qu.edu.qa/ qinaat.hussain@uhasselt.be

Hanqin Feng

School of Mathematics and Statistics, UNSW
UNSW, Sydney NSW 2052
Email: hanqin.feng@unswalumni.com

Raphael Grzebieta

Transport and Road Safety (TARS) Research Centre, UNSW
1st Floor West Wing, Old Main Building (K15), UNSW, Sydney NSW 2052
Tel: +61 2 9385 4479; Fax; +61 2 9385 6040 Email: r.grzebieta@unsw.edu.au

Tom Brijs

Uhasselt, Transportation Research Institute (IMOB)
Agoralaan, 3590 Diepenbeek, Belgium
Tel: +32(0)11 26 91 55; Email: tom.brijs@uhasselt.be

Jake Olivier

School of Mathematics and Statistics, UNSW
The Red Centre, Room 2051, UNSW, Sydney NSW 2052
Tel: +61 2 9385 6656; Email: j.olivier@unsw.edu.au

The relationship between impact speed and the probability of pedestrian fatality during a vehicle-pedestrian crash: a systematic review and meta-analysis

ABSTRACT

Background: Pedestrians struck in motorised vehicle crashes constitute the largest group of traffic fatalities worldwide. Excessive speed is the primary contributory factor in such crashes. The relationship between estimated impact speed and the risk of a pedestrian fatality has generated much debate concerning what should be a safe maximum speed limit for vehicles in high pedestrian active areas.

Methods: Four electronic databases (MEDLINE, EMBASE, COMPENDEX, and SCOPUS) were searched to identify relevant studies. Records were assessed, and data retrieved independently by two authors in adherence with the PRISMA statement. The included studies reported data on pedestrian fatalities from motorised vehicle crashes with known estimated impact speed. Summary odds ratios (OR) were obtained using meta-regression models. Time trends and publication bias were assessed.

Results: Fifty-five studies were identified for a full-text assessment, 27 met inclusion criteria, and 20 were included in a meta-analysis. The analyses found that when the estimated impact speed increases by 1km/h, the odds of a pedestrian fatality increases on average by 11% (OR=1.11, 95% CI: 1.10-1.12). The risk of a fatality reaches 5% at an estimated impact speed of 30km/h, 10% at 37km/h, 50% at 59km/h, 75% at 69km/h and 90% at 80km/h. Evidence of publication bias and time trend bias among included studies were found.

Conclusions: The results of the meta-analysis support setting speed limits of 30 to 40 km/h for high pedestrian active areas. These speed limits are commonly used by best practice countries that have the lowest road fatality rates and that practice a Safe System Approach to road safety.

KEY WORDS: Pedestrian; fatality; impact speed; meta-analysis; systematic review

1. INTRODUCTION

Injuries and fatalities from road traffic crashes are a major public health problem. They account for the majority of deaths and disabilities due to all forms of injury worldwide [1]. Pedestrians in motorized vehicle crashes constitute the largest group of traffic fatalities, which accounts for approximately 400,00 each year worldwide [2], and the number is predicted to increase [1, 3, 4]. Speed has been identified as a key risk factor in such crashes: it influences both the probability of a crash and its severity [5-9].

Although drivers do not often travel at the speed limit, posted speed limits are strongly correlated with average travel speed [10]. The higher the travel speed of a vehicle, the higher the impact speed will be, assuming other physical parameters are constant such as deceleration, perception reaction time, and braking effectiveness. The impact speed during a crash with a pedestrian is strongly related to the risk of a pedestrian fatality [11, 12] and, hence, to the speed limit. Therefore, the relationship between impact speed and risk of fatality can be considered to be a critical factor in making decisions regarding the setting of speed limits.

Many studies have been conducted to date to estimate the relationship between estimated impact speed and the risk of a pedestrian fatality from pedestrian collision data [10]. The data is often collected either from an in-depth on-scene investigation or from police and/or medical reports. Logistic regression analysis is often used to determine the associated risk curves relating the probability of a fatality as a function of estimated impact speed. Although there is agreement that the risk of a fatality or injury increases with increased estimated impact speed, the odds ratios for any given particular estimated impact speed vary extensively between studies. This is particularly important when comparing earlier and later studies. This discrepancy has generated further scientific discussions concerning what is a safe speed limit and survivable impact speed for pedestrians on roads where their activity is high. Three previous reviews of estimated impact speed and pedestrian fatality or injury risk have been published to date [11-13].

Rosen et al. [11] conducted a literature review of 11 studies, where they assessed the data sampling procedures and methods of statistical analysis. Their study showed that, although there is a direct relationship between estimated impact speed and risk of a fatality reported in those studies, earlier studies

provided much higher risk estimates. That is, in earlier studies the probability of a fatality at for example, 60 km/h was around 80-90%, whereas Rosen et al. estimated it to be about 20%. The authors argue the discrepancy is the result of earlier studies adopting an outcome-based sampling scheme, which did not adjust for sample bias. For instance, assume a hypothetical case where the national fatality rate was 10 out of 100 crashes between pedestrians and vehicles. Now suppose a study used a subset of those crashes with a higher fatality rate, e.g., 3 out of 20 crashes. This outcome-based sampling problem may result in an analytical bias towards overestimating the fatality risk in earlier studies. Therefore, sample weights, derived on the basis of national or regional traffic fatality rate, were then used to adjust for selection bias. Therefore, sample weights, derived on the basis of the national or regional traffic fatality rate, were then used to adjust for selection bias. Similarly, in another review, Kroyer et al. [12] claimed that past studies were incorrect in regards to determining the risk of a fatality versus estimated impact speed due to sample bias. They excluded studies that did not adjust for bias, leaving only 5 studies for their review.

In the third review, Pok et al. [13] focused on pedestrian injury severity rather than pedestrian fatality. The authors used the Abbreviated Injury Scale (AIS 1 to 6) codes [14] and the Injury Severity Score (ISS) [15] to calculate the risk of injury versus estimated impact speed. They then summarized the findings of 6 studies to estimate the pedestrian injury curves for AIS 1-6 as functions of impact speed. For pedestrians sustaining AIS 1 to 6 injuries, the 50th percentile of impact speeds were 19, 25, 31, 40, 53 and 71 km/h, respectively.

The previous published reviews have some further limitations. For instance, Kroyer et al. and Pok et al. only included a limited number of studies (5 and 6 respectively). Pok et al. plotted risk curves for AIS2-5 using mathematical theoretical curves instead of estimates from actual real-world collision data, due to the lack of published studies. All three previous reviews did not evaluate odds ratios using a clear statistical methodology (i.e., meta-analysis) and did not provide mathematical details about how their risk curves were plotted. Finally, yet importantly, many new studies have been published focusing on determining the relationship between the risk of pedestrian injury and fatality versus estimated impact speed.

None of the three previous reviews followed the PRISMA [16, 17] statement for reporting systematic reviews which is often required by journals. PRISMA (Preferred Reporting Items for Systematic Reviews and Meta-Analyses) is an evidence-based minimum set of items designed to enable the production of a wide array of systematic reviews and meta-analyses of the benefits and harms of healthcare interventions. PRISMA consists of a checklist and a flow diagram, which provides transparency to the process of selecting papers for systematic reviews. The PRISMA flow diagram maps out information about the number of records identified in the literature search, the number of studies included and excluded and the reasons for exclusion.

In addition to impact speed, many other factors could contribute to an increased risk of a pedestrian fatality during a vehicle-pedestrian crash. These include the age of the victim [18], vehicle designs [19, 20], emergency response time, e.g., crashes occurring in rural areas compared to urban areas [21], and the roadway-built environment [22]. However, the main contribution of this systematic review and meta-analysis is to further increase the accuracy of the estimated relationship between pedestrian fatality or injury risk and impact speed.

2. METHODS

Four electronic databases (MEDLINE, EMBASE, COMPENDEX and SCOPUS) were searched to identify relevant studies. An initial search was performed on 12 May 2017, which was updated on 24 March 2019. In order to include as many studies as possible, broad search terms were used such as ((pedestrian* or walk*) AND (accident* or fatal*)). The searches were not restricted by language, location of the data collection, publication date or any other criteria that might increase the probability of missing any relevant study. Reference lists from the included studies and previously published reviews [11-14] were searched to identify additional records. Two review authors independently assessed every record retrieved against inclusion criteria to determine which study should be included in a meta-analysis. Discrepancies were resolved either through discussion or adjudicated by a third author. Study authors were contacted when additional information was required to resolve conflicts or determine eligibility.

The PRISMA flow chart (see Figure 1) was used to present the number of records included or excluded at each stage. Full text studies were included if they reported the results of a logistic regression of pedestrian fatality (including non-fatal injuries) and the impact speed of motor vehicles. Studies which did not provide logistic regression results but provided sufficient summary statistics were also included. Pedestrians of all ages who had injuries from a frontal impact with a motor vehicle were included. Studies based on data for other travel modes (i.e., cyclists or motorists), studies that only reported speed limits or speed zones, and reviews of other studies were excluded.

Data from each included study was extracted and summarized by one author and checked by a second author. Again, any discrepancies were resolved through discussion and/or by a third author. The information extracted from each study included: the name(s) of the author(s), the year of publication, the data source, the countries where data was collected, injury type (fatal, AIS2+, or AIS3+), the sample size, the age categories of the included pedestrians (child, adult or all), the data type (on-scene or collision report), the vehicle type, and the outcome measures (the estimated values of the logistic regression and their variance).

A series of hierarchical random-effects models were fitted for the odds ratio using the extracted information. Model 1 was a baseline random-effects model with no moderators, Model 2 included injury type as a moderator and Model 3 included injury types as a moderator and random effects for the study. A final model was chosen using the likelihood ratio test (LRT) and Akaike's information criterion (AIC). Study-level moderators were added individually and assessed for inclusion in the final model. Residual heterogeneity was estimated and assessed by Cochran's Q and the index of heterogeneity I^2 . Publication bias was inspected visually using funnel plot methods and numerically by the rank correlation test. Time trend bias was examined through leverage points by plotting estimated odds ratios against publication year. All statistical analyses were performed using the R metafor package [23].

3. RESULTS

The PRISMA flow diagram for reviewed studies is presented in Figure 1. The initial and the updated searches identified a total of 1479 records including 469 duplicates, which were removed. Screening of titles

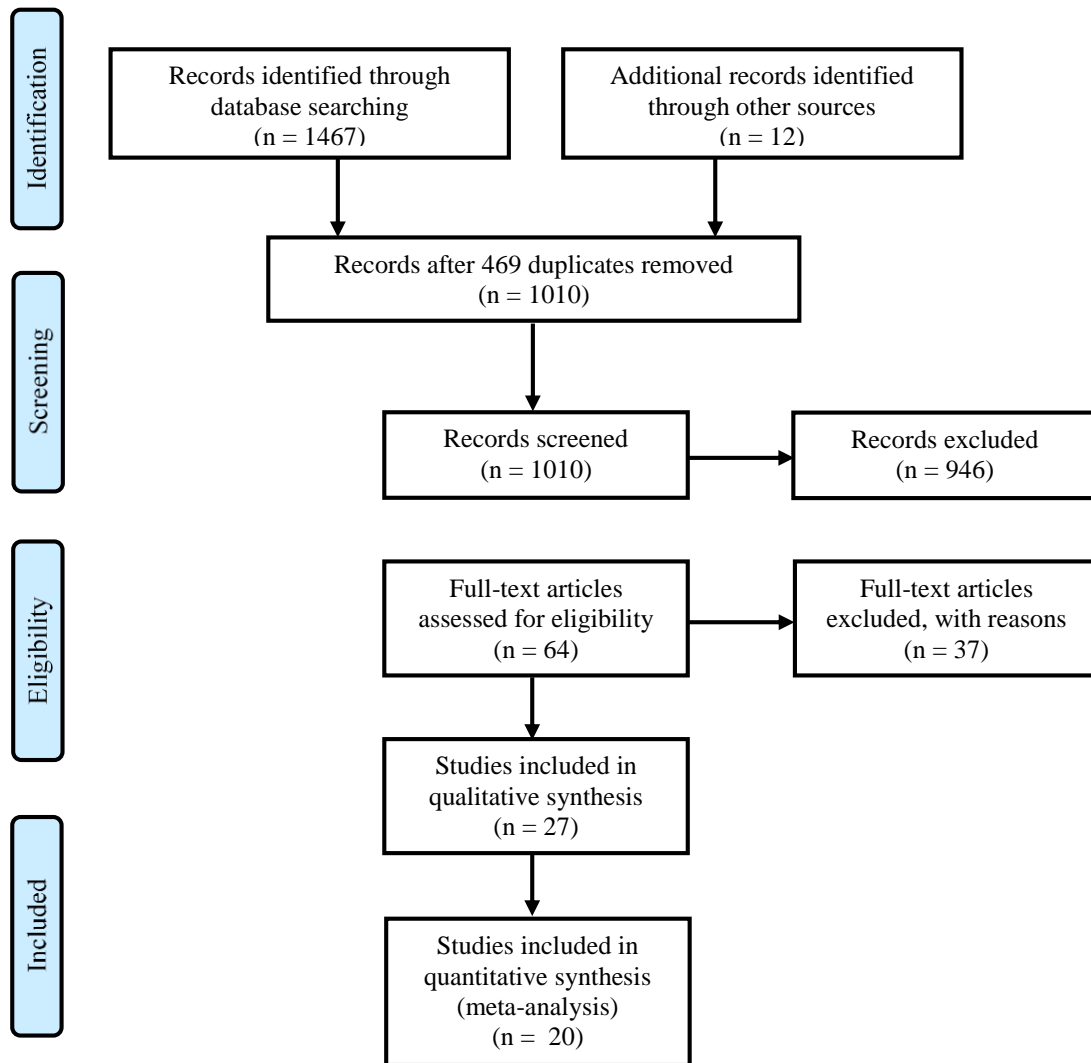


Figure 1: PRISMA flow diagram of included studies

and abstracts eliminated a further 946 records leaving 64 articles for a full-text assessment. After excluding a further 37 articles for various reasons, 27 articles met the inclusion criteria.

The primary reasons for excluding studies were as follows: the collected data was based on speed limits or speed zones only [24-30], the data was limited only to head impacts [31] or ground contact injuries [32], no injury or fatality data was used [33, 34], the inability to compute an S-shaped risk curve [35-40], the study data was a subset of another included study [41-46], the collected data consisted of only fatal cases [47-49], the original full-text of the study was unavailable [50-52], the study was not focused on frontal impacts [53-55], the study used experimental data [56, 57], the impact speed was not measured or included [58, 59], and

the impact speed was unknown for most of the cases which was imputed from other information and crashes were not limited to only frontal impact [60]. A further seven studies were excluded from the meta-analysis because the information in the original articles were insufficient. The study authors were contacted for additional information, but the study authors either did not respond to the request or they did not provide relevant information. The exact reasons were: the raw data or regression results were not presented or not clear [61-65], the original data was no longer available [66] and the study data was a subset of another included study [67].

Characteristics of the studies included for the meta-analysis are given in Table 1. Within the 20 included studies, 15 provided information concerning the relationship between estimated impact speed and pedestrian

TABLE 1: Characteristics of studies meeting selection criteria

| Authors | Year | Country | Study size | Injury type | Age | Data type | Weighted analysis |
|---------------------------|------|---------|------------|--------------|-------|-----------|-------------------|
| Ashton | 1980 | UK | 358 | Fatal | All | Report | |
| Garrett & John | 1981 | US | 494 | Fatal | All | On-scene | |
| Cuerde <i>et al.</i> | 2007 | UK | 108 | Fatal | All | On-scene | |
| Oh <i>et al.</i> | 2008 | Korea | 101 | Fatal | All | Report | |
| Rosen & Sander | 2009 | Germany | 490 | Fatal | Adult | On-scene | Yes |
| Fredriksson <i>et al.</i> | 2010 | Germany | 161 | AIS3+ | All | On-scene | Yes |
| Kong & Yang | 2010 | China | 104 | Fatal | Adult | On-scene | Yes |
| Nie <i>et al.</i> | 2010 | China | 110 | Fatal, AIS3+ | All | On-scene | |
| Richards | 2010 | UK | 197 | Fatal | All | On-scene | Yes |
| Zhao <i>et al.</i> | 2010 | China | 184 | Fatal | All | Report | |
| Helmer <i>et al.</i> | 2011 | US | 376 | Fatal | All | On-scene | |
| Peng <i>et al.</i> | 2012 | Germany | 22 | AIS2+, AIS3+ | Adult | On-scene | |
| Matsui <i>et al.</i> | 2013 | Japan | 32614 | Fatal | All | Report | |
| Peng <i>et al.</i> | 2013 | Germany | 43 | AIS2+, AIS3+ | Adult | On-scene | |
| Tefft | 2013 | US | 315 | Fatal | Adult | On-scene | Yes |
| Zhang <i>et al.</i> | 2014 | China | 207 | Fatal | All | On-scene | |
| Li <i>et al.</i> | 2015 | China | 109 | Fatal, AIS3+ | Adult | Report | |
| Nie <i>et al.</i> | 2015 | China | 371 | Fatal | Adult | Report | |
| Wang <i>et al.</i> | 2016 | Germany | 404 | AIS2+ | Adult | On-scene | |
| Li <i>et al.</i> | 2017 | Germany | 489 | AIS2+ | All | On-scene | |

fatality [68-82]. These studies included crash data from 36,138 pedestrians struck by the front of a motor vehicle. The other five studies focused on injury severity (i.e., AIS2+ and/or AIS3+) and included 1,119 injured pedestrians [83-87]. The included studies span 38 years (1980-2017), representing six countries (China, Germany, Japan, South Korea, UK and US).

Data from 14 studies were collected from in-depth on-the-scene collision investigations, while data from six studies were from police and medical reports. In five of the included studies, a weighting procedure was used to analyse the data comparing it against national or regional fatality rates, while the other 15 studies did not use such an approach.

The results from the multivariate meta-regression models are given in Table 2. Model 3 was chosen as a final model which includes injury type as a moderator and random effects for the study. Study-level random effects were included to account for dependence as some of the included studies reported both pedestrian fatality risk and AIS3+ risk using the same samples. The inclusion of injury type improved model fit by AIC and the likelihood ratio test, while the inclusion of a random intercept did not. Study-level moderators for age, publication year, country, data type and whether the data was weighted, were individually added to

TABLE 2: Summary of the multivariate meta-regression models

| Multivariate models | | | | | |
|-----------------------------|--------|----------------|------|----|---------|
| Model | AIC | I ² | LRT | Df | P-value |
| (Model 1) Baseline | -125.7 | 63.7% | - | - | - |
| (Model 2) +injury type | -151.9 | 48.4% | 30.3 | 2 | <0.0001 |
| (Model 3) +random intercept | -151.1 | - | 1.2 | 1 | 0.273 |
| Model 3 with moderators | | | | | |
| Model | AIC | | LRT | Df | P-value |
| Model 3 | -151.1 | | - | - | - |
| Model 3 +age | -149.6 | | 4.4 | 3 | 0.218 |
| Model 3 +year | -158.4 | | 9.3 | 1 | 0.002 |
| Model 3 +country | -144.1 | | 3.0 | 5 | 0.700 |
| Model 3 +data type | -149.7 | | 0.5 | 1 | 0.464 |
| Model 3 +weighted or not | -152.3 | | 3.2 | 1 | 0.074 |

Model 3. None of these moderators improved model fit except for publication year. This potentially indicates time trend bias, which refers to changes in study findings over time.

To verify time trend bias, publication years were plotted against the estimated log-odds ratios (Figure 2). The dashed lines represent the estimated log-odds ratios while the solid red line is the fitted linear regression for fatal cases. According to Hoaglin & Welch [88], points with $h_{ii} > 2p/n$ are leverage points (h_{ii} are the values of the projection matrix). In this case, the four observations lying on the left are leverage points. These leverage points help explain the high significance of publication year as a moderator. There was also visual evidence of publication bias from the funnel plot of the final model residuals (see Figure 3) and by the rank correlation test ($\tau = 0.31$, $p = 0.005$).

A forest plot of odds ratios by injury type is given in Figure 4 with summary estimates taken from Model 3. For ease of interpretation, the fitted values were transformed to the odds ratio scale through exponentiation. The odds of pedestrian fatality, AIS3+ injury, or AIS2+ injury will on average increase by 11% (OR = 1.11, 95% CI: 1.10-1.12), 9% (OR = 1.09, 95% CI: 1.07-1.11) and 7% (OR = 1.07, 95% CI: 1.05-1.10) respectively, as the estimated impact speed increases by 1 km/h. From this meta-analysis, the risk of a pedestrian fatality will reach 5%, 10%, 50%, 75% and 90% when the estimated impact speed reaches 30 km/h, 37 km/h, 59 km/h, 69 km/h and 80 km/h respectively.

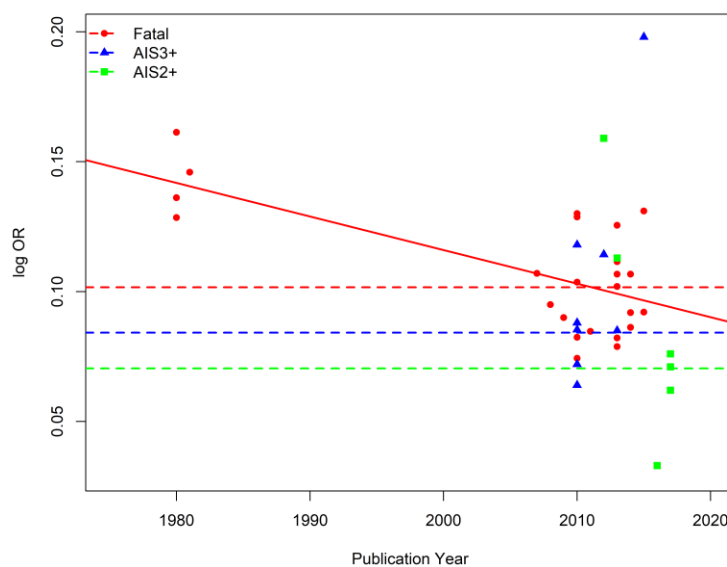


FIGURE 2: Estimated log-odds ratios versus publication year

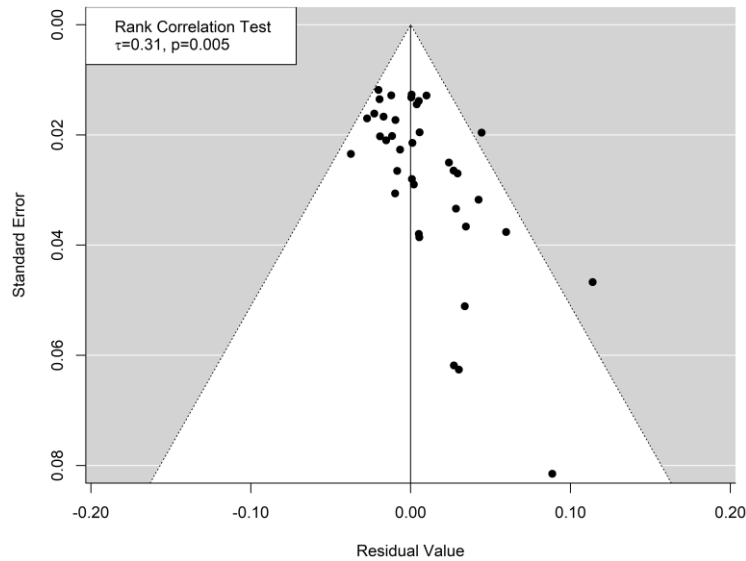


FIGURE 3: Funnel plot of residuals from multivariate meta-regression model

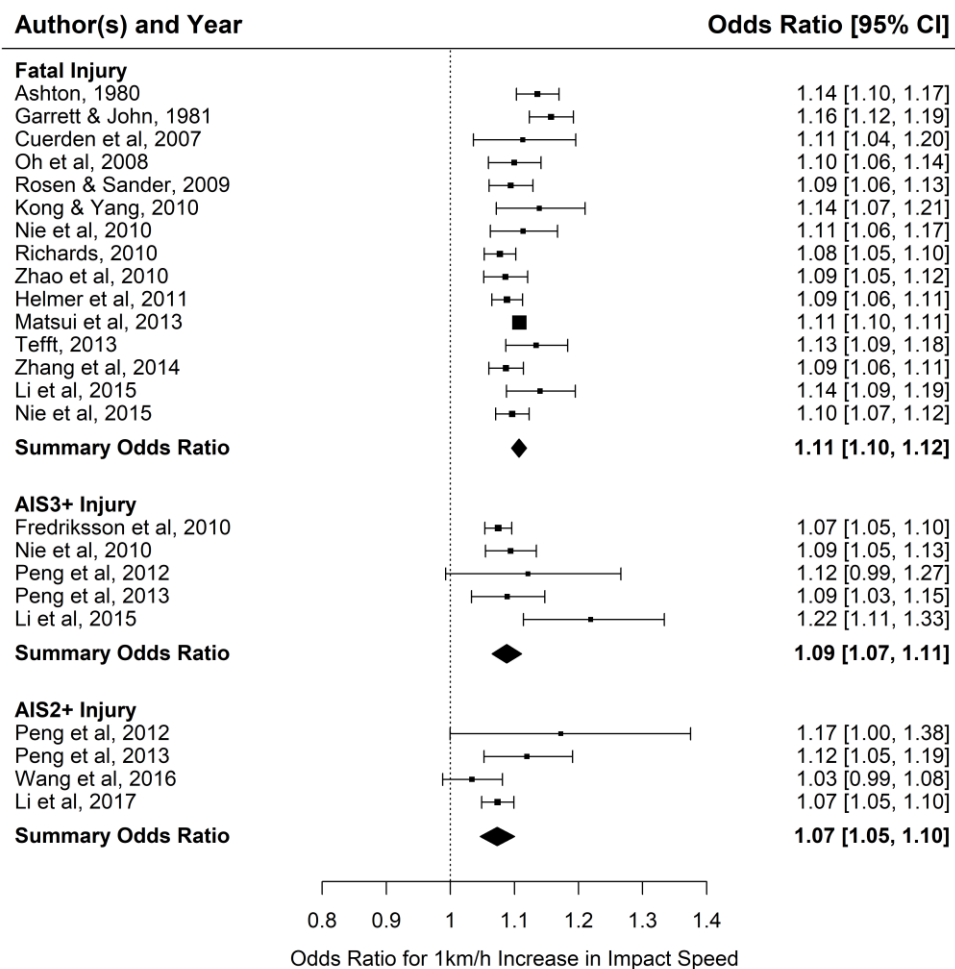


FIGURE 4: Forest plot of study and summary odds ratios by pedestrian injury type (95% CI)

An overview of S-shaped curves synthesizing all 15 included studies for pedestrian fatality risk is given in Figure 5. The thicker red curve is plotted according to the results from the multivariate meta-regression model while black curves represent study estimates of the 15 included studies.

A series of sensitivity analyses were performed to assess the influence of analytic decisions made (see Table 3). Since time trend bias was found among the included studies in the final model, the analysis was restricted to studies published since 2010. The estimated log-odds ratios for fatal, AIS2+ and AIS3+ all reduced, though by a small amount.

Two previous studies investigated differences in risk of pedestrian fatality due the vehicle types [74, 80]. The frontal shape of a vehicle is possibly a crucial factor. The relative vehicle-pedestrian geometry influences the trajectory of pedestrians in a crash, such as throw distance or impact location of the head strike. However, for our analysis (Model 3), we included studies that restricted samples for vehicle types, as well as those that did not make that restriction. Therefore, only the five studies which did not restrict the

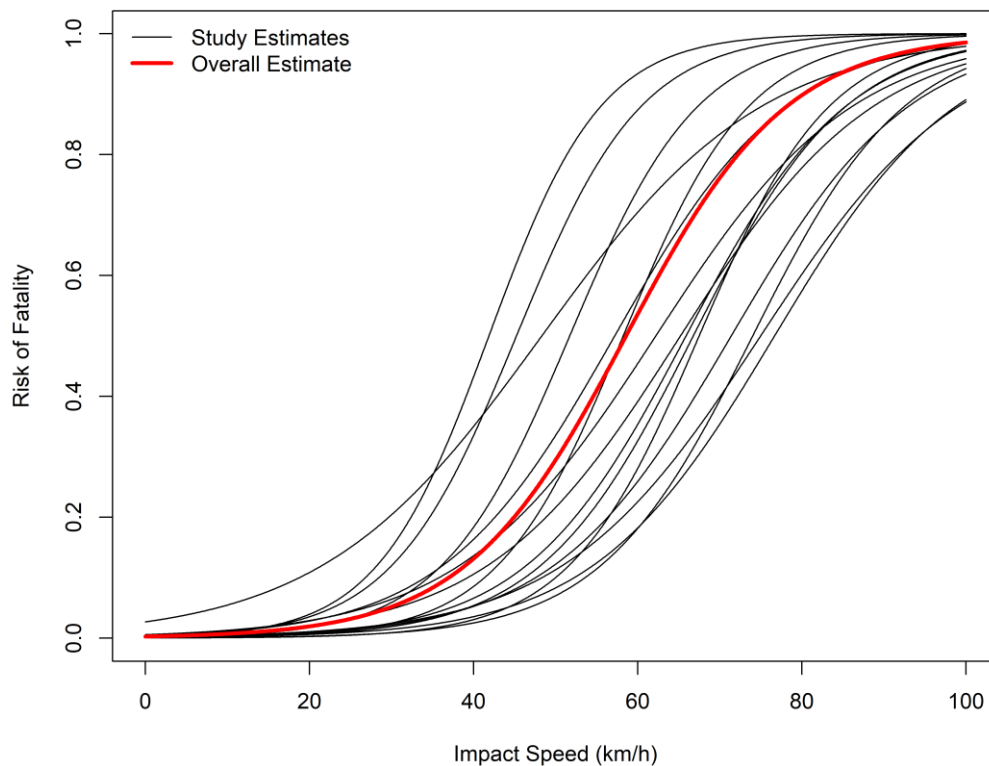


FIGURE 5: Plot for S-shaped curves for pedestrian fatality risk by impact speed

TABLE 3: Comparison of odds ratios from final model and sensitivity analyses

| Injury type | Final model | Publications since 2010 | Without vehicle type restriction | Exclusion of Matsui et al. (2013) | Weighted Estimates | Random effects logistic regression |
|-------------|-------------|-------------------------|----------------------------------|-----------------------------------|--------------------|------------------------------------|
| Fatal | 1.107 | 1.105 | 1.103 | 1.107 | 1.094 | 1.107 |
| AIS3+ | 1.088 | 1.079 | 1.076 | 1.089 | 1.075 | --- |
| AIS2+ | 1.073 | 1.072 | 1.079 | 1.074 | --- | --- |

sample for the vehicle types, but considered all types of vehicles in their analyses, were considered for the sensitivity analysis. The fitted odds ratios were similar for fatal, AIS3+ and AIS2+ injuries.

Among all included studies, the sample size for Matsui et al. [78] was much larger than all other studies (n=32,614). It is possible that this study may have dominated the summary results. The analysis was repeated without the data from Matsui and colleagues and the fitted values were similar to the final model.

Recent research has been critical of likely selection biases in earlier studies and recommend performing analyses weighted against the national fatality rate. We limited our analysis to only studies with weighted analyses [72, 73, 75, 79, 83]. The analysis did not consider the AIS2+ injury as none of the included studies used weighted data. The estimated odds ratios reduced by a little amount for both fatal and AIS3+ injuries.

Meta-analyses are often performed on summary statistics instead of raw data from each study. There is a potential for some information loss in those situations. We reanalysed the data for studies that provided raw data using a logistic regression model with study level random effects. Only one study provided raw data for serious injury while 11 studies reported raw data on fatalities. The estimated odds ratio for fatality was identical to our final model to three decimal places.

4. DISCUSSION

This systematic review identified 27 relevant studies that assessed motor vehicle impact speed and pedestrian fatality or injury. Of these studies, 20 were included in a meta-analysis with 15 contributing data on when a pedestrian fatality occurs. This includes 8 studies not included in previous reviews [69, 74, 77-82]. Data from these studies estimate an increase in the odds of 11% for a pedestrian fatality (95% CI: 1.10-

1.12), 9% for AIS3+ injuries (95% CI: 1.07-1.11), and a 7% increase in AIS2+ injuries (95% CI: 1.05-1.10) for a 1 km/h increase in estimated impact speed.

This is the first systemic review to combine odds ratios from individual studies using a meta-analysis method and the first systematic review to adhere to the PRISMA protocol. This study, therefore, provides a more accurate estimate of the relationship between impact speed and pedestrian fatality risk in a crash. Moreover, these results provide support for prescribing speed limits of 30 and 40 km/h for high pedestrian active roads. For instance, the results of the meta-analysis indicate that the risk of a fatality reaches 5% at an estimated impact speed of 30 km/h and 10% at 37 km/h.

Drivers usually do not adapt [10] and drive faster than the posted speed limits [89], and travel based on the design and features of the road and its surroundings [90]. In this study, the risk of pedestrian fatalities increases more rapidly for any small increase in the impact speed between 30-70 km/h compared to the other speed regimes. To keep drivers' traveling speed under the set speed limits, appropriate speed management (e.g., speed calming measures, enforcement) is also essential in areas with high pedestrian traffic.

Past research has recommended adjustment for sample bias by weighting data against the national fatality rate. However, the above analysis indicates that adding a study-level moderator for whether the data was weighted (or not) does not markedly change the results. The results from our sensitivity analysis are somewhat in line with the previous authors [11, 12] who argue that studies which did not adjust for sample bias overestimated pedestrian fatality risk for any given impact speed. Moreover, the distribution of fatalities across estimated impact speeds is not known in national fatality statistics and can be significantly different from the study sample. So, it is not clear whether weighting is needed in the analysis and, if weighting is needed, it is unclear if estimated weights accurately represent all fatalities for the population being studied.

The estimated odds ratios reduced towards a null effect for studies published since 2010. This is possibly due to the development of the frontal design of vehicles resulting from pedestrian impact consumer test ratings, which have progressively improved crash severity mitigation [91]. Moreover, improvements in medical emergency response and treatments have also helped reduce fatality risk.

5. LIMITATIONS

Despite the value of this study several limitations should be considered. Seven relevant studies [61-67] were not included due to insufficient information in the original articles. The authors of these studies were contacted, but study authors did not supply relevant information, or they did not respond to the request. Many of the included studies were published more than 10 years ago and contact information for study authors was difficult to obtain, thus potentially explaining the poor response rate. Another three studies [50-52] were not included because the original full-texts could not be located. The earliest one of these three studies was published in 1964, which is more than 50 years ago. The articles were also requested from the interlibrary loans services of UNSW and UHasselt, but research librarians at these institutions could not locate these reports.

The statistical models used in this meta-analysis assumes the effect sizes are independent between studies. On a few occasions, more than one study used participants from the same database. For example, six included studies used the sample from GIDAS (German In-Depth Accident Study). Different inclusion criteria were applied in their studies such as year of the sample, age groups of the pedestrians, and car types. Therefore, it was difficult to determine the most complete dataset. The influence of double counting was minimized by excluding obvious sample repetitions such as when data used in a published study was a subset of the data from another study. Nevertheless, it is still possible that in a few instances double counting may have inadvertently occurred.

There are likely factors other than impact speed that influence the risk of a pedestrian fatality or serious injury such as age, vehicle type, the response time of emergency assistance, and characteristics of the roadway design. However, very few studies if any have investigated these factors, which limits the ability to assess them in a meta-analysis.

There was a moderate level of residual heterogeneity among the effect sizes in the final model ($I^2 = 48.4\%$). This may have been influenced by unaccounted for differences among the included studies. For instance, crash data types used in some of the included studies are from in-depth on-the-scene investigations while

other studies used data from police and medical reports. Some of the included studies weighted data against national fatality data and, some of them filtered the data for adult pedestrians only. The included studies used data from only six countries (China, South Korea, Japan, Germany, UK, US) and the emergency and medical services can be highly variable among those countries. The summary estimates could greatly be improved if more relevant studies are included and especially those from countries not represented in this review.

Another sensitivity analysis was performed for studies published since 2010 to assess the impact of older studies. It was decided that the years of data collected for each study is perhaps a better indicator than publication year. However, a sensitivity analysis on publication years was conducted since two studies did not mention years of data collection [74, 78], two studies used combination of datasets collected at different time intervals [84, 85], and three studies used data collected over a 10 year span [68, 86, 87].

6. CONCLUSION

Speed limits are an important regulation that can help reduce the kinetic energy and consequential injury severity in a crash. It is important for policy makers to prescribe speeds that are safe, i.e. survivable, for all road users. For pedestrians, it is not possible to fully eliminate the risk of a fatality. However, our results suggest an impact speed of 30 km/h has on average a risk of a fatality of around 5%. The risk increases to 13% for an impact speed of 40 km/h and 29% at 50km/h. Speed limits should be set lower in areas of poor visibility and thus slower reaction times. Furthermore, such speed limits could be supported by appropriate speed calming approaches such as physical measures (e.g., roadway design, pedestrian islands, and speed humps), surface treatments (e.g., road markings, rumble strips, and perceptual countermeasures), and traffic enforcement (e.g., speed cameras) to motivate drivers lowering their traveling speeds. Such speed limits and speed calming approaches are already commonly used by best practice countries that have the lowest road fatality rates and that practice a Safe System Approach to road safety.

ACKNOWLEDGEMENT

The first author was partially funded by the Transportation Reserach Institute (IMOB), Hasselt University, Belgium to visit Australia to work on this project. Furthermore, an early version of this research was presented at TRB Annual Meeting 2019.

REFERENCES

1. World Health Organization, (2004). World Report on Road Traffic Injury.
2. Naci, H., Chisholm, D., & Baker, T. D. (2009). Distribution of road traffic deaths by road user group: a global comparison. *Injury Prevention*, 15(1), 55. doi:10.1136/ip.2008.018721
3. Mohan, D. (2002). Traffic safety and health in Indian cities. *Journal of Transport and Infrastructure*, 9(1), 79-94.
4. Odero, W., Garner, P., & Zwi, A. (1997). Road traffic injuries in developing countries: a comprehensive review of epidemiological studies. *Tropical Medicine & International Health*, 2(5), 445-460.
5. Aarts, L., and van Schagen, I. (2006) Driving speed and the risk of road crashes: A review, *Accident Analysis & Prevention*, 38(2), 215-224.
6. Alhajyaseen, W. (2015) The Integration of Conflict Probability and Severity for the Safety Assessment of Intersections, *Arabian Journal for Science and Engineering*, Vol. 40, no. 2, Springer, pp. 421-430.
7. De Pauw, E., Daniels, S., Thierie, M., & Brijs, T. (2014). Safety effects of reducing the speed limit from 90km/h to 70km/h. *Accident Analysis & Prevention*, 62, 426-431.
8. De Pelsmacker, P., & Janssens, W. (2007). The effect of norms, attitudes and habits on speeding behavior: Scale development and model building and estimation. *Accident Analysis & Prevention*, 39(1), 6-15.
9. Heydari, S., Miranda-Moreno, L. F., & Liping, F. (2014). Speed limit reduction in urban areas: A beforeafter study using Bayesian generalized mixed linear models. *Accident Analysis & Prevention*, 73, 252-261.

- 279 10. Elvik, R., Christensen, P. & Amundsen, A. (2004) Speed and road accidents. An evaluation
280 of the Power Model. TØI report 740/2004. Institute of Transport Economics TOI, Oslo
- 281 11. Rosen, E., Stigson, H., & Sander, U. (2011). Literature review of pedestrian fatality risk as
282 a function of car impact speed. *Accident Analysis & Prevention*, 43(1), 25-33.
- 283 12. Kroyer, H. R., Jonsson, T., & Varhelyi, A. (2014). Relative fatality risk curve to describe
284 the effect of change in the impact speed on fatality risk of pedestrians struck by a motor
285 vehicle. *Accident Analysis & Prevention*, 62, 143-152.
- 286 13. Pok, T. W., Josevski, N., Orton, T. L., Sandvik, A. L., Jones, C. M., & Richardson, S. A.
287 (2012). Literature review of pedestrian injury severity with vehicle impact speeds and the
288 development of curves to predict pedestrian injury likelihood (AIS 1 to AIS 6) versus
289 vehicle impact speeds. In *Proceedings: the 7th Australasian Congress on Applied*
290 *Mechanics (ACAM 7)*, 9-12 December 2012, the University of Adelaide, North Terrace
291 Campus/National Committee on Applied Mechanics of Engineers Australia (p. 800).
292 Engineers Australia.
- 293 14. AAAM, (2008). Abbreviated Injury Scale 2005, Update 2008 Association for the
294 Advancement of Automotive Medicine, Barrington, IL, USA
- 295 15. Baker, S. P., O'Neill, B., Haddon Jr, W., & Long, W. B. (1974). The injury severity score:
296 a method for describing patients with multiple injuries and evaluating emergency care.
297 *Journal of Trauma and Acute Care Surgery*, 14(3), 187-196.
- 298 16. Moher, D., Liberati, A., Tetzla, J., Altman, D. G., & Prisma Group. (2009). Preferred
299 reporting items for systematic reviews and meta-analyses: the PRISMA statement. *PLoS*
300 *Medicine*, 6(7), e1000097.
- 301 17. Liberati, A., Altman, D. G., Tetzla, J., Mulrow, C., Gtzsche, P. C., Ioannidis, J. P., ... &
302 Moher, D. (2009). The PRISMA statement for reporting systematic reviews and meta-
303 analyses of studies that evaluate health care interventions: explanation and elaboration.
304 *PLoS Medicine*, 6(7), e1000100.

- 305 18. Tay, R., Choi, J., Kattan, L., & Khan, A. (2011). A multinomial logit model of pedestrian-
306 vehicle crash severity. *International Journal of Sustainable Transportation*, 5(4), 233-249.
307 doi:10.1080/15568318.2010.497547
- 308 19. Desapriya, E., Subzwari, S., Sasges, D., Basic, A., Alidina, A., Turcotte, K., & Pike, I.
309 (2010). Do light truck vehicles (LTV) impose greater risk of pedestrian injury than
310 passenger cars? a meta-analysis and systematic review. *Traffic Injury Prevention*, 11(1), 48-
311 56. doi:10.1080/15389580903390623
- 312 20. Kim, J. K., Ulfarsson, G. F., Shankar, V. N., & Mannering, F. L. (2010). A note on
313 modeling pedestrian-injury severity in motor-vehicle crashes with the mixed logit model.
314 *Accident Analysis and Prevention*, 42(6), 1751-1758. doi:10.1016/j.aap.2010.04.016
- 315 21. Pour-Rouholamin, M., & Zhou, H. (2016). Investigating the risk factors associated with
316 pedestrian injury severity in Illinois. *Journal of Safety Research*, 57, 9-17.
317 doi:10.1016/j.jsr.2016.03.004
- 318 22. Mansfield, T. J., Peck, D., Morgan, D., McCann, B., & Teicher, P. (2018). The effects of
319 roadway and built environment characteristics on pedestrian fatality risk: A national
320 assessment at the neighborhood scale. *Accident Analysis & Prevention*, 121, 166-176.
321 doi:https://doi.org/10.1016/j.aap.2018.06.018
- 322 23. Viechtbauer, W., *Conducting Meta-Analyses in R with The metafor Package*. Vol. 36. 2010.
- 323 24. Chen, H., Cao, L., & Logan, D. B. (2012). Analysis of risk factors affecting the severity
324 of intersection crashes by logistic regression. *Traffic Injury Prevention*, 13(3), 300-307.
- 325 25. Garder, P. E. (2004). The impact of speed and other variables on pedestrian safety in Maine.
326 *Accident Analysis & Prevention*, 36(4), 533-542.
- 327 26. Kroyer, H. R. (2015). The relation between speed environment, age and in-jury outcome for
328 bicyclists struck by a motorized vehicle: a comparison with pedestrians. *Accident Analysis*
329 *& Prevention*, 76, 57-63.
- 330 27. Mitchell, R. J., Bambach, M. R., Foster, K., & Curtis, K. (2015). Risk factors associated

with the severity of injury outcome for paediatric road trauma. *Injury*, 46(5), 874-882.

28. Olszewski, P., Szagaa, P., Wolanski, M., & Zielinska, A. (2015). Pedestrian fatality risk in accidents at unsignalized zebra crosswalks in Poland. *Accident Analysis & Prevention*, 84, 83-91.

29. Sasidharan, L., Wu, K. F., & Menendez, M. (2015). Exploring the application of latent class cluster analysis for investigating pedestrian crash injury severities in Switzerland. *Accident Analysis & Prevention*, 85, 219-228.

30. Senserrick, T., Boufous, S., De Rome, L., Ivers, R., & Stevenson, M. (2014). Detailed analysis of pedestrian casualty collisions in Victoria, Australia. *Traffic Injury Prevention*, 15(sup1), S197-S205.

31. Ding, C., Lubbe, N., Li, S., & Zhou, S. (2018). Influence of head impact locations in car-to-pedestrian accidents on pedestrian head injury. Paper presented at the 2018 International Research Council on the Biomechanics of Injury Asia Conference, IRCOBI Asia 2018, April 25, 2018 - April 27, 2018, Lonavala, India.

32. Shang, S., Otte, D., & Simms, C. K. (2017). Pedestrian-ground contact injuries observed from German in-depth accident data. Paper presented at the 2017 International Research Council on the Biomechanics of Injury Conference, IRCOBI 2017, September 13, 2017 - September 15, 2017, Antwerp, Belgium.

33. Han, Y., Li, Q., Wang, F., Wang, B., Mizuno, K., & Zhou, Q. (2018). Analysis of pedestrian kinematics and ground impact in traffic accidents using video records. *International Journal of Crashworthiness*. 24(2): 211-220. doi:10.1080/13588265.2018.1429520

34. Li, Q., Han, Y., & Mizuno, K. (2018). Ground Landing Mechanisms in Vehicle-To-Pedestrian Impacts Based on Accident Video Records. *SAE International*. 2018-April. doi:10.4271/2018-01-1044

35. Bahouth, G., Graygo, J., Digges, K., Schulman, C., & Baur, P. (2014). The benefits and tradeoffs for varied high-severity injury risk thresholds for advanced automatic crash

notification systems. *Traffic Injury Prevention*, 15(sup1), S134-S140.

36. Hamdane, H., Serre, T., Masson, C., & Anderson, R. (2016). Relevant factors for active pedestrian safety based on 100 real accident reconstructions. *International Journal of Crashworthiness*, 21(1), 51-62.

37. Lakkam, S., & Koetniyom, S. (2015). Investigation of accident scenarios between pedestrians and city buses in Thailand. *International Journal of Auto-motive and Mechanical Engineering*, 12, 3076.

38. Murakami, D., Pal, C., Kawabe, Y., & Okabe, T. (2013). Analysis of Pedestrian Kinematics and Injury Mechanism in Real World Accidents. In *Proceedings of the FISITA 2012 World Automotive Congress* (pp. 325-339). Springer, Berlin, Heidelberg.

39. Neal-Sturgess, C., Coley, G., & De Olivera, P. (2002). Pedestrian injuries: Effects of impact speed and contact stiffness. *Vehicle Safety*.

40. Waiz, F. H., Hoeger, M., & Fehlmann, W. (1983). Speed limit reduction from 60 to 50 km/h and pedestrian injuries (No. 831625). SAE Technical Paper.

41. Davis, G. (2001). Relating severity of pedestrian injury to impact speed in vehicle-pedestrian crashes: Simple threshold model. *Transportation Research Record: Journal of the Transportation Research Board*, (1773), 108-113.

42. Matsui, Y., Doi, T., Oikawa, S., & Ando, K. (2013). Features of fatal pedestrian injuries in vehicle-to-pedestrian accidents in Japan. *SAE International Journal of Transportation Safety*, 1(2013-01-0777), 297-308.

43. Oikawa, S., & Matsui, Y. (2017). Features of serious pedestrian injuries in vehicle-to-pedestrian accidents in Japan. *International Journal of Crashworthiness*, 22(2), 202-213.

44. Oikawa, S., Matsui, Y., Doi, T., & Sakurai, T. (2016). Relation between vehicle travel velocity and pedestrian injury risk in different age groups for the design of a pedestrian detection system. *Safety Science*, 82, 361-367.

45. Rosen, E., Kallhammer, J. E., Eriksson, D., Nentwich, M., Fredriksson, R., & Smith, K.

- 383 (2010). Pedestrian injury mitigation by autonomous braking. *Accident Analysis &*
384 *Prevention*, 42(6), 1949-1957.
- 385 46. Cookson, R. E., Cuerden, R. W., Richards, D. C., & Manning, J. (2009). A review of the
386 causes of fatal pedestrians' injuries resulting from collisions with car fronts-comparing
387 vehicles registered in 2002 or later with earlier models. In *Proceedings of the International*
388 *Research Council on the Biomechanics of Injury conference* (Vol. 37, pp. 207-222).
389 International Research Council on Biomechanics of Injury.
- 390 47. Wang, B., Wang, F., Otte, D., Han, Y., & Peng, Q. (2018). Effects of passenger car front
391 profile and human factors on pedestrian lower extremity injury risk using German in-depth
392 accident data. 1-8. doi:10.1080/13588265.2017.1422375
- 393 48. Karger, B., Teige, K., Bhren, W., & DuChesne, A. (2000). Relationship be-tween impact
394 velocity and injuries in fatal pedestrian-car collisions. *International Journal of Legal*
395 *Medicine*, 113(2), 84-88.
- 396 49. Zhao, H., Yin, Z., Yang, G., Che, X., Xie, J., Huang, W., & Wang, Z. (2014). Analysis of
397 121 fatal passenger car-adult pedestrian accidents in China. *Journal of Forensic and Legal*
398 *Medicine*, 27, 76-81.
- 399 50. Pasanen, E. (1992). *Driving speeds and pedestrian safety: a mathematical*. Publication 77,
400 Helsinki University of Technology. Transportation Engineering, Otaniemi, Finland
- 401 51. Teichgraber, W. (1983). Die Bedeutung der Geschwindigkeit fur die Verkehrssicherheit. *Z*
402 *VERKEHRSSICHERHEIT*, 29(2).
- 403 52. Yaksich, S. (1964). *Pedestrians with Mileage; a Study of Elderly Pedestrian Accidents in*
404 *St. Petersburg, Florida*. American Automobile Association.
- 405 53. Lindman, M., Jakobsson, L., & Jonsson, S. (2011, September). Pedestrians interacting with
406 a passenger car a study of real world accidents. In *Proceedings of the International Research*
407 *Council on Biomechanics of Injury (IRCOBI) Conference*. Krakow, Poland (pp. 255-264).
- 408 54. Roudsari, B., Kaufman, R., & Koepsell, T. (2006). Turning at intersections and pedestrian

injuries. *Traffic Injury Prevention*, 7(3), 283-289.

55. Tamura, A., Hasegawa, J., & Koide, T. (2018). Comparative Analysis on Traumatic Brain Injury Risk Due to Primary and Secondary Impacts in a Pedestrian Sideswipe Accident. *ASCE-ASME Journal of Risk and Uncertainty in Engineering Systems, Part B: Mechanical Engineering*, 4(4). doi:10.1115/1.4039464

56. Matsui, Y., Han, Y., & Mizuno, K. (2011). Performance of collision damage mitigation braking systems and their effects on human injury in the event of car-to-pedestrian accidents. *Stapp Car Crash Journal*, 55, 461-478.

57. Vychytil, J., Hyncik, L., Manas, J., Pavlata, P., Striegler, R., Moser, T., & Valasek, R. (2016). Prediction of Injury Risk in Pedestrian Accidents Using Virtual Human Model VIRTHUMAN: Real Case and Parametric Study (No. 2016-01-1511). SAE Technical Paper.

58. Damsere-Derry, J., Ebel, B. E., Mock, C. N., Afukaar, F., & Donkor, P. (2010). Pedestrians' injury patterns in Ghana. *Accident Analysis & Prevention*, 42(4), 1080-1088.

59. Helmer, T., Ebner, A., Samaha, R. R., Scullion, P., & Kates, R. (2010). Injury risk to specific body regions of pedestrians in frontal vehicle crashes modeled by empirical, in-depth accident data. *Stapp Car Crash Journal*, 54, 93-117.

60. Martin, J. L., & Wu, D. (2018). Pedestrian fatality and impact speed squared: Cloglog modeling from French national data. *Traffic Injury Prevention*, 19(1), 94-101. doi:10.1080/15389588.2017.1332408

61. Anderson, R. W., McLean, A. J., Farmer, M. J. B., Lee, B. H., & Brooks, C. G. (1997). Vehicle travel speeds and the incidence of fatal pedestrian crashes. *Accident Analysis & Prevention*, 29(5), 667-674.

62. Hannawald, L., & Kauer, F. (2004). Equal effectiveness study on pedestrian protection. Technische Universitat Dresden.

- 436 63. Yuan, Q., Li, Y., & Zhou, Q. (2007). Statistical analysis of pedestrian? vehicle impact
437 characteristics of passenger-car-to-pedestrian accidents in Beijing China. *International*
438 *Journal of Vehicle Safety*, 2(3), 334-344.
- 439 64. Niebuhr, T., Junge, M., & Achmus, S. (2013). Pedestrian injury risk functions based on
440 contour lines of equal injury severity using real world pedestrian/passenger-car accident
441 data. *Annals of Advances in Automotive Medicine*, 57, 145.
- 442 65. Zhao, H., Yin, Z., Yang, G., Che, X., Xie, J., Huang, W., & Wang, Z. (2015). A study on
443 adult pedestrian severe injuries and fatalities induced by passenger cars in Chongqing,
444 China. *International Journal of Vehicle Safety*, 8(2), 180-191.
- 445 66. Oh, C., Kang, Y. S., Youn, Y., & Konosu, A. (2008). Development of probabilistic
446 pedestrian fatality model for characterizing pedestrian-vehicle collisions. *International*
447 *Journal of Automotive Technology*, 9(2), 191-196.
- 448 67. Lefler, D. E., & Gabler, H. C. (2004). The fatality and injury risk of light truck impacts with
449 pedestrians in the United States. *Accident Analysis & Prevention*, 36(2), 295-304.
- 450 68. Ashton, S. J. (1980). A preliminary assessment of the potential for pedestrian injury
451 reduction through vehicle design (No. 801315). SAE Technical Paper.
- 452 69. Garrett, J. W. (1981). An analysis of fatal pedestrian accidents (No. 810323) SAE Technical
453 Paper.
- 454 70. Cuerden, R., Richards, D., & Hill, J. (2007). Pedestrians and their survivability at different
455 impact speeds. In *Proceedings of the 20th International Technical Conference on the*
456 *Enhanced Safety of Vehicles*, Lyon, France, Pa-per (No. 07-0440).
- 457 71. Oh, C., Kang, Y. S., & Kim, W. (2008). Assessing the safety benefits of an advanced
458 vehicular technology for protecting pedestrians. *Accident Analysis & Prevention*, 40(3),
459 935-942.
- 460 72. Rosen, E., & Sander, U. (2009). Pedestrian fatality risk as a function of car impact speed.
461 *Accident Analysis & Prevention*, 41(3), 536-542.

- 462 73. Kong, C., & Yang, J. (2010). Logistic regression analysis of pedestrian casualty risk in
463 passenger vehicle collisions in China. *Accident Analysis & Prevention*, 42(4), 987-993.
- 464 74. Nie, J., Yang, J., & Li, F. (2010, November). A Study on Pedestrian Injuries Based on
465 Minivan and Sedan Real-World Accidents. In *Optoelectronics and Image Processing*
466 (ICOIP), 2010 International Conference on (Vol. 1, pp. 160-163). IEEE.
- 467 75. Richards, D. C. (2010). Relationship between speed and risk of fatal injury: pedestrians and
468 car occupants.
- 469 76. Zhao, H., Yin, Z., Chen, R., Chen, H., Song, C., Yang, G., & Wang, Z. (2010). Investigation
470 of 184 passenger car-pedestrian accidents. *International Journal of Crashworthiness*, 15(3),
471 313-320.
- 472 77. Helmer, T., Scullion, P., Samaha, R. R., Ebner, A., & Kates, R. (2011). Predicting the injury
473 severity of pedestrians in frontal vehicle crashes based on empirical, in-depth accident data.
474 *International Journal of Intelligent Transportation Systems Research*, 9(3), 139.
- 475 78. Matsui, Y., Oikawa, S., & Ando, K. (2013). Risks of pedestrian serious injuries and fatalities
476 associated with impact velocities of cars in car-versus-pedestrian accidents in Japan. *Stapp*
477 *Car Crash Journal*, 57, 201.
- 478 79. Teft, B. C. (2013). Impact speed and a pedestrian's risk of severe injury or death. *Accident*
479 *Analysis & Prevention*, 50, 871-878.
- 480 80. Zhang, Z., Zhao, G. F., Yang, N., & Cheng, X. (2014). Regression Analysis of Pedestrian
481 Fatality Risk and Impact Speed. In *Advanced Materials Research* (Vol. 971, pp. 1300-
482 1303). Trans Tech Publications.
- 483 81. Li, K., Fan, X., & Yin, Z. (2015). Pedestrian injury patterns and risk in minibus collisions
484 in China. *Medical Science Monitor: International Medical Journal of Experimental and*
485 *Clinical Research*, 21, 727.
- 486 82. Nie, J., Li, G., & Yang, J. (2015). A study of fatality risk and head dynamic response of
487 cyclist and pedestrian based on passenger car accident data analysis and simulations. *Traffic*

488 Injury Prevention, 16(1), 76-83.

489 83. Fredriksson, R., Rosen, E., & Kullgren, A. (2010). Priorities of pedestrian protection A real-
490 life study of severe injuries and car sources. *Accident Analysis & Prevention*, 42(6), 1672-
491 1681.

492 84. Peng, Y., Chen, Y., Yang, J., Otte, D., & Willinger, R. (2012). A study of pedestrian and
493 bicyclist exposure to head injury in passenger car collisions based on accident data and
494 simulations. *Safety Science*, 50(9), 1749-1759.

495 85. Peng, Y., Deck, C., Yang, J., Otte, D., & Willinger, R. (2013). A study of adult pedestrian
496 head impact conditions and injury risks in passenger car collisions based on real-world
497 accident data. *Traffic Injury Prevention*, 14(6), 639-646.

498 86. Wang, B., Yang, J., & Otte, D. (2016). The Effects of Vehicle Front Design Variables and
499 Impact Speed on Lower Extremity Injury in Pedestrian Collisions Using In-Depth Accident
500 Data. In *Measuring Technology and Mechatronics Automation (ICMTMA)*, 2016 Eighth
501 International Conference on (pp. 768-773). IEEE.

502 87. Li, G., Lyons, M., Wang, B., Yang, J., Otte, D., & Simms, C. (2017). The influence of
503 passenger car front shape on pedestrian injury risk observed from German in-depth accident
504 data. *Accident Analysis & Prevention*, 101, 11-21.

505 88. Hoaglin, D. C., & Welsch, R. E. (1978). The hat matrix in regression and ANOVA. *The*
506 *American Statistician*, 32(1), 17-22.

507 89. Stephens, A. N., Nieuwesteeg, M., Page-Smith, J., & Fitzharris, M. (2017). Self-reported
508 speed compliance and attitudes towards speeding in a representative sample of drivers in
509 Australia. *Accident Analysis & Prevention*, 103, 56-64.
510 doi:<https://doi.org/10.1016/j.aap.2017.03.020>

511 90. Goldenbeld, C., & van Schagen, I. (2007). The credibility of speed limits on 80km/h rural
512 roads: The effects of road and person(ality) characteristics. *Accident Analysis & Prevention*,
513 39(6), 1121-1130. doi:<https://doi.org/10.1016/j.aap.2007.02.012>

514 91. European Commission, (2016). Advanced driver assistance systems. European
515 Commission, Directorate General for Transport, November 2016.